

Assessment of Training Noise Impacts on the Red-Cockaded Woodpecker: 1998 - 2000

David K. Delaney, Larry L. Pater, Robert J. Dooling, Bernard November 2002 Lohr, Beth F. Brittan-Powell, Linton L. Swindell, Tim A. Beaty, Larry D. Carlile, Eric W. Spadgenske, Bruce A. MacAllister, and Robert H. Melton



Executive Summary

This report is submitted as partial fulfillment of the terms of the Strategic Environmental Research and Development Program (SERDP) funded project CS-1083, "Assessment of Training Noise Impacts on the Red-cockaded Woodpecker." The purpose of this research is to assess the effects of military training noise on the endangered Red-cockaded Woodpecker (RCW) and to develop assessment methodology. The results of this research will provide a scientific basis for RCW management protocols, and will partially satisfy requirements of a 1996 U.S. Fish and Wildlife Service (USFWS) biological opinion that requires the Army to assess effects of implementing the 1996 "Management Guidelines for the RCW on Army Installations." These guidelines will significantly reduce restrictions on training for Army installations on which RCWs are present. These Army installations include: Camp Blanding, FL; Fort Benning, GA; Fort Bragg, NC; Fort Gordon, GA; Fort Stewart, GA; Fort Polk, LA; Peason Ridge, LA; Camp Mackall, NC; Military Ocean Terminal (MOT) Sunny Point, NC; Fort Jackson, SC; Leesburg Training Center, SC (Schreiber et al. 1997a, Scrieber et al. 1997b, Shaw et al. 1997). This research was conducted on Fort Stewart, GA, jointly by the U.S. Army Construction Engineering Research Laboratory (CERL), an element of the U.S. Army Engineer Research and Development Center (ERDC); Fort Stewart; and the U.S. Army Forces Command (FORSCOM). This project was developed by ERDC/CERL in coordination with FORSCOM, the USFWS RCW Recovery Coordinator and the Region 4 office, the Fort Stewart Directorate of Training, the Fort Stewart Directorate of Public Works (DPW) Fish and Wildlife Branch, and the Army Threatened and Endangered Species (TES) User Group.

This research tested RCW response in 1999 and 2000 (during the breeding season) to controlled military training noise events under realistic conditions, namely .50-caliber blank fire and artillery simulators. From 1998-2000, we passively (i.e., no control over the noise source) monitored RCW response to various military training noise events. We measured both proximate response behavior and nesting success, while continuing to measure baseline behavioral data from undisturbed RCW groups. Measured levels of experimental noise did not affect RCW nesting success or productivity. RCW flush response increased as stimulus distance decreased, regardless of stimulus type. Woodpeckers returned relatively quickly after flushing from the nest, with return times being comparable between 1999 and 2000 rates. Unweighted noise levels within RCW nest cavities

were substantially louder than levels recorded at the base of the tree. When noise data were examined using woodpecker weighting (dBW), noise levels inside nest cavities were not significantly different compared with levels recorded outside the nest cavity.

Foreword

This study was conducted for the Strategic Environmental Research and Development Program (SERDP) under Fiscal Year 1998 Conservation Project, No. CS-1083, "Assessment of Training Noise Impacts on the Red-cockaded Woodpecker." The technical monitor was Dr. Robert Holst, SERDP Program Manager.

The work was performed by the Ecological Processes Branch (CN-N) of the Installations Division (CN), Construction Engineering Research Laboratory (CERL). The CERL Principal Investigator was Dr. Larry D. Pater; David K. Delaney was Co-Principal Investigator. The work was done in cooperation with Jones Technologies, Inc., Lanham, MD. Robert J. Dooling, Bernard Lohr, and Beth F. Brittan-Powell are employed by the University of Maryland. Linton Swindell, Tim A. Beaty, Larry D. Carlile, and Eric W. Spadgenske are employed at Fort Stewart, GA. Bruce MacAllister and Robert H. Melton are employed by the U.S. Army Engineer Research and Development Center's Construction Engineering Research Laboratory (ERDC/CERL). The technical editor was Gloria J. Wienke, Information Technology Laboratory. Steve Hodapp is Chief, CEERD-CN-N, and Dr. John T. Bandy is Chief, CEERD-CN. The associated Technical Director was Dr. William D. Severinghaus, CEERD-CV-T. The Director of CERL is Dr. Alan W. Moore.

CERL is an element of the U.S. Army Engineer Research and Development Center (ERDC), U.S. Army Corps of Engineers. The Commander and Executive Director of ERDC is COL John Morris III, EN and the Director of ERDC is Dr. James R. Houston.

DISCLAIMER: The contents of this report are not to be used for advertising, publication, or promotional purposes. Citation of trade names does not constitute an official endorsement or approval of the use of such commercial products. All product names and trademarks cited are the property of their respective owners. The findings of this report are not to be construed as an official Department of the Army position unless so designated by other authorized documents.

DESTROY THIS REPORT WHEN IT IS NO LONGER NEEDED. DO NOT RETURN IT TO THE ORIGINATOR.

Acknowledgements

This work could not have been accomplished without the field assistance of Tim Brewton, Heidi Erickson, Mike Fay, Ted Hasty, Michelle Huffman, Margaret Klich, Stephanie Kovac, Brian Platt, Aaron Rinker, and Andrew Walde of Jones Technologies, Inc. The authors thank Lynsa Nguyen, student, and Angie Cone, Cecily Smith, and Andrew Walde of Jones Technologies, Inc. for their help in analyzing numerous videotapes collected over the years, and Teryl Grubb at Rocky Mountain Research Station for his help in placing video cameras. We particularly appreciate the skill, support, and cooperation of the 1st Battalion, 64th Armor Regiment, the 2nd Battalion, 7th Infantry, the 3rd Battalion, 7th Infantry, the 3rd Squadron, 7th Cavalry and the 10th Engineer Battalion for providing personnel, equipment and supplies to assist us in conducting the experimental trials at Fort Stewart, GA. We thank the Directorate of Training (DOT) Office on Fort Stewart; particularly Howard Bullard, Tony Tellames, Joe Caligiure and Drew Brown for logistical support and close cooperation in the day-today operation of this study. We especially thank the Fort Stewart Directorate of Public Works Fish and Wildlife Branch for their help during this project. We also thank Ralph Costa, U.S. Fish and Wildlife Service Red-cockaded Woodpecker (RCW) Coordinator, for his suggestions and support during this study. We thank Dr. William Russell, Environmental Noise Program, U.S. Army Center for Health Promotion and Preventive Medicine for providing acoustical training to RCW field teams and report reviews. We thank all the reviewers of this and previous project reports for all their helpful comments and suggestions.

Contents

Ex	ecutive Summary	3
Fo	reword	5
Ac	knowledgements	6
Со	ontents	7
Lis	st of Figures and Tables	9
	Figures	9
	Tables	11
1	Introduction	13
	Background	13
	Objectives	15
	Approach	16
	Scope	16
	Mode of Technology Transfer	17
2	Literature Review	18
	Ecology	18
	Anthropogenic Impacts	19
3	Technical Approach	23
	Null Hypotheses	23
	Study Area	23
	Sample Cluster Selection	24
	Impact Measures	27
	Behavior and Proximate Response Measurement Protocols	28
	Demographic and Nesting Success Data	29
	Video Surveillance	30
	Sound Instrumentation and Recording	31
	Sound Metrics	32
	Statistical Data Analysis	34
4	Results	35
	Initiation Dates for Each Nesting Phase	35

	Overall Population Dynamics	35
	Sample Group Population Dynamics	36
	Power analysis	38
	Noise and Response Monitoring Summary	39
	Passive monitoring	39
	Distance and Noise Level Thresholds for Response	40
	Experimental tests	40
	Passive events	42
	Noise Measurement Testing	50
	Observation of Nest Depredation Events	52
5	Discussion	54
	Nesting Success	54
	Flush Response and Related Behaviors	55
	Flush response	55
	Natural disturbance effects	56
	Nesting behaviors	56
	Distance and Sound Thresholds	57
	Noise Measurement Test	58
	Management Implications	58
6	Plans and Conclusions	60
	Plans	60
	Conclusions	60
Re	eferences	61
Аp	pendix A: Project-related Legal Requirements	71
Αp	pendix B: Woodpecker Audiogram	73
۸	annudia C. Summer Data Tables	94
Аþ	ppendix C: Summary Data Tables	81
Д р	ppendix D: Source Spectra Examples	91
А р	ppendix E: Video Images from RCW Nests	98
CE	ERL Distribution	100
RE	EPORT DOCUMENTATION PAGE	101
	., v.,, paviikiinii i i i i i i i i i i i i i i i i	

List of Figures and Tables

_						
_		\sim		r	^	0
	ı	a	u	•	C	Э

1	Adult Red-cockaded woodpecker delivering prey to the nest	14
2	Location of Fort Stewart within the State of Georgia	24
3	Locations of training areas and RCW groups on Fort Stewart	25
4	Artillery simulator blast	26
5	Soldier firing a .50-caliber machine gun with blanks	27
6	Assessment hierarchy for training impact on threatened and endangered species	28
7	Examples of audiograms and frequency weighting.	34
8	1998 power analysis comparing disturbed versus control fitness parameters	38
9	RCW flush frequency by stimulus type and distance	41
10	Mean return time for RCW in response to experimental testing in 1999 and 2000	41
11	Dose-response relation between .50-caliber blank fire events and distance for RCWs on Fort Stewart in 1999 and 2000.	43
12	Dose-response relation between artillery simulator blast events and distance for RCWs on Fort Stewart in 1999 and 2000.	43
13	Noise levels from M-16 live fire events at cluster 103 on 12 May 1999	45
14	Noise levels from M-16 live fire events at cluster 103 on 17 May 1999	45
15	Noise levels from M-16 live fire events at cluster 103 on 13 May 1999	46
16	SEL weighting comparison for M-16 live fire events on 17 May 1999, from supersonic bullet noise and muzzle blast noise near cluster 103	46
17	Description of RCW flush response to artillery blast events at cluster 83 on 20 May 1998.	48
18	Description of RCW flush response to artillery blast events at cluster 83 on 21 May 1998.	48
_		
B -		
В-	, ,	76
B -	3 Average ABR audiogram for three Downy Woodpeckers (top), audiogram adjusted for absolute difference between physiological and behavioral thresholds (middle), and average passerine audiogram (estimated using	
	behavioral techniques).	76

B - 4	Average power spectra for three common Downy Woodpecker calls and the "drum" of this species.	77
B - 5	Average power spectra of two common vocalizations of the Red-cockaded Woodpecker	78
B - 6	Average audiogram for three Downy Woodpeckers (solid line) with superimposed average power spectra for the percussive "drum" (dotted line), and the "call note" vocalization (dashed line) of Downy Woodpeckers	79
B - 7	Average audiogram for three Downy Woodpeckers (solid line) with superimposed average power spectra for the "call note" of Red-cockaded Woodpeckers (dashed line).	79
D - 1	Weighting comparison for experimental artillery simulator blast at cluster 47 on 5 June 2000 (post-fledging testing).	91
D - 2	Weighting comparison for experimental .50-caliber blank fire at cluster 47 on 5 June 2000 (post-fledging testing)	92
D - 3	Weighting comparison for passive M-16 live fire at cluster 103 on 6 May 2000	92
D - 4	Weighting comparison for passive M-16 live muzzle blast fire at cluster 103 on 6 May 2000.	93
D - 5	Weighting comparison for a passive helicopter flight at cluster 206 on 25 May 2000	93
D - 6	Weighting comparison for passive artillery muzzle blast noise at cluster 83 on 21 May 1998.	94
D - 7	Weighting comparison for passive artillery muzzle blast noise at cluster 83 on 21 May 1998.	94
D - 8	Weighting comparison for passive vehicle noise at cluster 23 on 16 May 2000	95
D - 9	Weighting comparison for passive MLRS fire at cluster 88 on 13 April 2000	95
D - 10	Weighting comparison for passive Stinger/Drone Missile impact at cluster 83 on 16 May 2000	96
D - 11	Weighting comparison of passive Stinger Missile fire at cluster 83 on 16 May 2000	96
D - 12	Weighting comparison of a passive grenade simulator blast at cluster 221 on 23 June 2000.	97
D - 13	Weighting comparison for passive C-130 airplane flight at cluster 51 on 15 May 1998.	97
E - 1	Red-bellied Woodpecker usurping a nest from a Red-cockaded Woodpecker in 2000 on Fort Stewart, GA.	98
E - 3	Rat snake leaving a Red-cockaded Woodpecker nest after consuming two eggs and two nestlings in 1998 on Fort Stewart, GA.	98
E - 4	Nest depredation attempt by a Red-shouldered Hawk in 1998 on Fort Stewart, GA	99
E - 5	Nest depredation attempt by an American Crow in 2000 on Fort Stewart, GA	99

Tables

C - 1	distance, and noise levels of experimental artillery simulator testing on Fort Stewart, GA, 1999-2000.	82
C - 2	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of experimental .50-caliber blank fire testing on Fort Stewart, GA, 1999-2000.	83
C - 3	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive M-16 live fire on Fort Stewart, GA, 1999-2000	84
C - 4	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive helicopter flights on Fort Stewart, GA, 1998-2000	84
C - 5	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise level of passive large-caliber (> 20mm) live fire on Fort Stewart, GA, 1998-2000.	84
C - 6	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive vehicles on Fort Stewart, GA, 1998-2000	85
C - 7	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive missile fire on Fort Stewart, GA, 2000	85
C - 8	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive simulators blasts on Fort Stewart, GA, 1998-1999	85
C - 9	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of experimental M-16 blank fire on Fort Stewart, GA, 1998.	85
C - 10	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive fixed-wing aircraft (i.e., C-130) on Fort Stewart, GA, 1998.	86
C - 11	Variation in artillery simulator blast noise levels based on year, stimulus distance, microphone position and weighting function on Fort Stewart, GA, 1999-2000	86
C - 12	Variation in .50-caliber blank fire noise levels based on year, stimulus distance, microphone position, and weighting function on Fort Stewart, GA, 1999-2000	88
C - 13	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive M-16 live fire on Fort Stewart, GA, 1999-2000.	89
C - 14	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive helicopter flights on Fort Stewart, GA, 1998-2000	90
C - 15	Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise level of passive large-caliber (> 20mm) live fire on Fort Stewart, GA, 1998-2000.	90

1 Introduction

Background

Section 7 of the Endangered Species Act (ESA) passed in 1973 requires that all Federal agencies conserve Threatened and Endangered Species (TES), and in consultation with the U.S. Fish and Wildlife Service (USFWS) or National Marine Fisheries Service (NMFS), ensure their actions are not likely to jeopardize the continued existence of any TES or result in the destruction or adverse modification of critical habitat. TES management on military installations, particularly that involving the Red-cockaded Woodpecker (RCW, Picoides borealis), has raised questions about the interaction between Army training and the conservation of RCW on military lands. The goal of RCW management on Fort Stewart is to meet the Installation Regional Recovery Goal, while eliminating conflicts with the training mission by eliminating the need for training restrictions (Fort Stewart Endangered Species Management Planning Team [ESMPT] 2001). Appendix A contains a brief summary of project-related legal requirements. Because noise management has traditionally focused on minimizing human annoyance, loud activities have often been relocated to sparsely populated areas where wildlife resides. This has led to increased interactions between military activity and wildlife (Holland 1991). Increasing importance has been placed on determining the extent of human-based impacts on wildlife (Bowles 1995), especially TES (Pater et al. 1999; Delaney et al. 1999, 2000, 2001; Hayden et al. 2002).

Red-cockaded Woodpeckers inhabit mature, open pine forests of the southeastern United States (Jackson 1994; Figure 1). This species was listed as endangered throughout its range on 13 October 1970 (35 Federal Register 16047 - 16048) and received federal protection with the passage of the ESA in 1973. Habitat loss has been cited as the single most important factor that has lead to the decline of RCW throughout its range (USFWS 2000). Intensive logging for lumber and clearing of forests for agriculture are leading causes of habitat loss (Frost 1993; Martin and Boyce 1993). Grazing by free-ranging hogs (Sus scrofa) and pine resin exploitation were two additional factors contributing to pine tree habitat loss in the 1800's (Frost 1993). Landers et al. (1995) and others have reported that human-based activities, such as fire suppression and clear cutting, further impacted longleaf pine ecosystems and associated RCW populations. Consequently, RCW are experiencing severe limitations in the number of available

cavity trees (Costa and Escano 1989; Rudolph et al. 1990; Conner et al 1991; Walters et al. 1992) and are suffering from a fragmented distribution (USFWS 2000).




Figure 1. Adult Red-cockaded Woodpecker delivering prey to the nest.

Historically, RCW populations were widely distributed throughout the southern United States from eastern Texas to the Atlantic coast, and north to New Jersey (Jackson 1987). The distribution has been reduced with the extirpation of RCW from New Jersey (Lawrence 1867), Missouri (Cunningham 1946, as cited in Jackson 1987), and most recently Maryland (Devlin et al. 1980). The majority of RCW are currently restricted to public lands, namely National Forests and military installations (Jackson 1978a; Lennartz et al. 1983). Military installations, in particular, represent a valuable resource in the recovery of TES (Jordan et al. 1995; USFWS 2000). It has been estimated that nearly a quarter of the remaining RCW are located on 16 military installations in the southeastern United States (Costa 1992; USFWS 2000), which includes the Fort Stewart population. Such a close association has led to increased conflicts between TES conservation requirements and the military's mission of maintaining combat readiness (Jordan et al. 1995).

In 1984, the Army established a 200-ft (61-m) buffer zone around all RCW clusters to protect nesting habitat and identify RCW management units. In 1996, the Department of the Army (DA) issued revised guidelines for the management of RCWs on military lands, to reduce training restrictions, and increase adaptive management of the RCW and its habitat. Under the revised guidelines, certain transient military activities are permitted within 50 ft (15 m) of RCW cavity trees. These include: (1) military vehicle and personnel travel, including armor;

(2) .50-caliber machine gun blank fire and 7.62-mm blank fire and below; (3) artillery/hand grenade simulators and Hoffman type devices; (4) hand digging of hasty individual fighting positions; (5) use of smoke grenades and star cluster/parachute flares; and (6) smoke and haze operation (see Hayden 1997 for a more detailed description of past and current Army guidelines for RCWs). A 1996 USFWS biological opinion requires the Army to assess effects due to implementing the 1996 guidelines (Jordan et al. 1997). This noise project provides an important aspect of this required assessment.

The Fort Stewart ESMPT (2001) has prepared a Multi-Species Endangered Species Management Plan (ESMP) for the installation that details changes under these revised guidelines: (1) consideration will be given jointly to training mission requirements and RCW biological requirements when implementing the Multi-Species ESMP; (2) reduction in off-limit area for thru-cluster maneuver traffic around cluster trees from 200 ft (61 m) to 50 ft (15 m); (3) the types of training activities allowed within RCW clusters will be expanded; (4) proactive management is required to achieve population RCW goals (i.e., recruitment cluster establishment and single RCW group augmentation); (5) increased monitoring and reporting requirements; (6) reductions in potential training restrictions give Base Commanders incentive to expand RCW populations; and (7) establishment of provisions for critical mission areas that have no training restrictions on new RCW clusters (Fort Stewart ESMPT 2001).

Fort Stewart has a Mission Compatible Goal (MCG) of 411 active RCW clusters, which is the number of protected clusters that Fort Stewart can manage under their current military mission (Fort Stewart ESMPT 2001). In addition to Fort Stewart's MCG, the USFWS has established a minimum number of active RCW clusters required to maintain a viable, recovered population of RCWs on Fort Stewart (500 active RCW clusters), which the USFWS refers to as the Installation Regional Recovery Goal (IRRG). To meet the USFWS goal of 500 active clusters, the Fort Stewart ESMPT (2001) has proposed the establishment of additional Supplemental Recruitment Clusters (SRCs). SRCs are RCW clusters on the installation that are not subject to standard USFWS requirements for RCW foraging habitat or training restrictions. This will ensure that installation use of SRCs will not constrain future facilities development on Fort Stewart that supports training and non-training capabilities (Fort Stewart ESMPT 2001).

Objectives

The primary research objective for this multiyear study was to determine the impact of military training noise on the endangered Red-cockaded Woodpecker.

The second objective was to develop a dose-response threshold relation for quantifying RCW responses to noise levels and stimulus distances, and relate these to nesting success. The third objective was to develop and disseminate cost-effective techniques for documenting the effects of training noise on TES populations. These techniques include the capability to characterize noise stimuli, to document behavioral responses, and to determine resulting population effects due to military noise. Achieving these objectives will provide a means to manage impact on both military training capability and TES, and will provide a factual basis for mitigation and management protocols and guidelines.

A revised edition of the U.S. Army Environmental Requirement and Technology Assessment (AERTA 1999) document was issued in 1999, and is currently undergoing review again. Under AERTA, specific research and management criteria must be met before any requirement can be resolved for a specific TES. The AERTA requirements also provide for the identification of TES and suggest dates for accomplishing specific goals. In these requirements, noise, maneuver training, and smokes and obscurants are the primary disturbance sources listed. This research directly addresses the #1 Army Conservation Pillar User Requirement, which is concerned with impacts of military operations on TES. The results of this research will partially satisfy requirements of the 1996 USFWS biological opinion (Jordan et al. 1997) that requires the Army to assess effects due to implementing the 1996 "Management Guidelines for the RCW on Army Installations."

Approach

Chapter 3 presents details of the technical approach used in this research. The chapter includes discussions of the study area, RCW group selection, impact measures, response protocols, nesting success, video surveillance, sound instrumentation and recording, sound metrics, and statistical analyses.

Scope

All aspects of the research plan were reviewed and approved by the USFWS and Fort Stewart before field work began. Results from this research apply directly to Fort Stewart, but are applicable to other installations in the southeastern United States where RCWs are exposed to similar noise levels and stimulus types. This study used population data collected at Fort Stewart under a Forces Command (FORSCOM) program. Specific evaluation of maneuver training impacts on RCWs was conducted under a separate, but closely coordinated research

effort (Hayden et al. 2002). Training noise sources examined during this study include: artillery simulators, .50-caliber blank fire, large-caliber live fire, small-arms live fire, grenade simulators, and helicopters. RCW response to other military activity, such as vehicle noise associated with maneuver training, aircraft flights, Multiple Launch Rocket System (MLRS) fire, and Stinger/Drone Missile fire, was documented opportunistically, but was not a priority in this study.

Mode of Technology Transfer

Products of this research have been provided directly to the Military Services for use during consultation with the USFWS and for development of management protocols. This aspect of the transition plan will directly help to alleviate impacts on military training capability and will provide information to the military that will guide effective management of impacts on endangered species populations. Other technology transfer methods will include technical papers and journal articles, and TES and noise workshops. Manuscripts from this study will be submitted to peer-reviewed professional journals (Journal of Wildlife Management, Condor, Wilson Bulletin). Project information will be disseminated through the Environmental Noise Program of the U.S. Army Center for Health Promotion and Preventive Medicine (CHPPM), the Army TES User Group, and the U.S. Air Force (USAF) International Bibliography on Noise (IBON). Other forums for dissemination include the U.S. Air Force/U.S. Army International Committee on Challenges of Modern Society (CCMS) subcommittees on noise effects, the International Committee on the Biological Effects of Noise (ICBEN), the Acoustical Society of America Animal Bioacoustics technical committee, and the Department of Defense (DoD) Environmental Noise Working Group.

2 Literature Review

Ecology

Red-cockaded Woodpeckers are gregarious, territorial, non-migratory, cooperative breeders (USFWS 2000). They are unusual woodpeckers in that they excavate nest and roost cavities in living pine trees (Jackson 1994). This behavior is thought to have evolved due to limited cavity availability in fire-adapted forests in the southeastern United States (Ligon 1970). Red-cockaded Woodpeckers appear to select old trees for cavity excavation due to their large heartwood diameter (Conner et al. 1994) and because older trees have a higher frequency of red heart fungus infection, which greatly reduces cavity excavation time (Conner and Rudolph 1995). Although they use a variety of pine tree species for cavities (Jackson 1971; Fort Stewart ESMPT 2001), they appear to prefer longleaf pine trees (Jackson 1971). On Fort Stewart, upwards of 79 percent of natural RCW cavities are in longleaf pine (*Pinus palustrus*), while slash (*P. elliottii*; 16 percent), loblolly (*P. taeda*; 4 percent), and pond pine (*P. serotina*; 1 percent) are used to a smaller degree (Fort Stewart ESMPT 2001).

Red-cockaded Woodpeckers feed on all life stages of arthropods from adult insects to larvae and eggs (Jackson 1994). The diet of adult and nestling RCWs may vary geographically (USFWS 2000). Researchers in South Carolina and Georgia found that nestlings were fed primarily wood roaches (Hanula and Franzreb 1995; Hanula et al. 2000), while RCW nestlings in Florida were fed equal proportions of various arthropods (Hess and James 1998). Red-cockaded Woodpeckers' foraging patterns vary by gender (Hooper and Lennartz 1981). Females forage mainly on the boles of trees, while males tend to forage in upper tree trunks and branches of pine trees (Ligon 1968; Ramsey 1980). RCWs appear to prefer foraging on large pine trees versus small diameter pine trees, though seasonal and habitat-based variations have been observed (Ramsey 1980). Larger trees appear to provide a greater surface area for foraging and easier access to prey due to looser and larger bark on older trees than on smaller trees (Ramsey 1980). Arthropod abundance and biomass also appears to increase with tree age and size (Hanula et al. 2000).

Anthropogenic Impacts

Noise disturbance studies have often been anecdotal and have failed to quantitatively measure either the stimulus or the behavioral response related to the animal's fitness. Predictive models for the relationship between disturbance dosage and quantifiable effects are even more scarce (Awbrey and Bowles 1990; Grubb and King 1991; Grubb and Bowerman 1997). Although many types of human disturbance have been reported as affecting birds (Fyfe and Olendorff 1976), little research had addressed the effects of human activity on woodpeckers. Charbonneau et al. (1983) and Beaty (1986) investigated the effects of habitat alteration on RCW fitness parameters. Until recently, researchers did not consider the possible effects of military training activities and noise on RCWs, though a large proportion of the RCW population resides on military installations (Costa 1992). Jackson (1983) was first to comment on the potential impacts of noise on RCWs. Subsequent research (Jackson and Parris 1995; Mobley et al. 1996; Wagner 1999; Doresky et al. 2001; Fort Stewart ESMPT 2001; Hayden et al. 2002) has compared RCW population parameters to different land management practices and passive military training intensities on various Army installations. None of these projects found any significant reduction in RCW fitness parameters. Only the study reported in this document has experimentally tested the potential effects of military training activities and noise on RCW fitness parameters (Pater et al. 1999; Delaney et al. 2000, 2001).

Few researchers have directly compared differences in bird responsiveness between aerial and ground-based disturbances (Bowles et al. 1990). Studies that have examined the effects of aircraft activity on nesting birds (e.g., Platt 1977; Windsor 1977; Ellis 1981; Anderson et al. 1989; Delaney et al. 1999) have often noted a slight but insignificant decrease in nesting success and productivity for disturbed versus undisturbed nests. In contrast, ground-based disturbances appear to have a greater effect than aerial disturbances on the nesting success of some bird species. In their classification tree model of Bald Eagle (Haliaeetus leucocephalus) responses to various anthropogenic disturbances, Grubb and King (1991) determined that Bald Eagles in Arizona showed the highest response frequency and severity of response toward ground-based disturbances, followed by aquatic, and lastly by aerial disturbances. Delaney et al. (1999) reported similar findings for Mexican Spotted Owl (Strix occidentalis lucida) response to military helicopter activity and chain saws, observing that chain saws elicited a greater flush response rate than helicopters at comparable distances and noise levels.

A bird's behavior during the nesting season is an important determinant of its ultimate nesting success or failure (Hohman 1986). Various bird species have been reported to abandon their nests after being exposed to ground-based and

aerial disturbances. White and Thurow (1985) reported that approximately 30 percent of Ferruginous Hawks (*Buteo regalis*) abandoned their nests after being exposed to various ground-based disturbances, but there were no controls for comparison. Anderson et al. (1989) reported that 2 of 29 Red-tailed Hawk nests were abandoned after being flushed by helicopter flights, compared with 0 of 12 control nests. Ellis et al. (1991) found only 1 of 19 Prairie Falcon (*Falco mexicanus*) nests was abandoned when exposed to frequent low-altitude jet flights during the nesting season (no control sites used). Platt (1977) reported similar rates with only 1 of 11 Gyrfalcon (*F. rusticolus*) nests failing (reportedly due to snow damage), compared with 0 of 12 control nests. Of the six Peregrine Falcon (*F. peregrinus*) nests exposed to helicopter flights, only 1 was abandoned (also apparently due to inclement weather) compared with 0 of 3 control nests (Windsor 1977).

Birds may be more susceptible to disturbance-caused nest abandonment early in the nesting season, possibly because parents have less energy invested in the nesting process (Knight and Temple 1986). Some animals appear reluctant to leave the nest later in the nesting season (Anderson et al. 1989; Ellis et al. 1991; Delaney et al. 1999). Steenhof and Kochert (1982) reported that Golden Eagles (Aquila chrysaetos) and Red-tailed Hawks exposed to human intrusions during early incubation had significantly lower nesting success than individuals exposed later in the season. Although reactions of adult birds at the nest can influence hatching rates and fledging success (Windsor 1977), flush behavior of adult birds from the nest is poorly quantified (Fraser et al. 1985; Holthuijzen et al. 1990; Delaney et al. 1999). In the few studies that have examined bird responses to specific disturbance types (e.g., aircraft approach distance), flush rates were higher if birds were naive (i.e., not previously exposed; Platt 1977). Some birds are more reluctant to flush off the nest during incubation and early nestling phases than later in the season (Grubb and Bowerman 1997; Delaney et al. 1999). Animal responsiveness has been shown to increase as the nesting season progresses (Grubb and Bowerman 1997). Delaney et al. (1999) found that Mexican Spotted Owls were more responsive to helicopters later in the reproductive cycle, which suggests that adult defensive behavior may decrease as the young mature. In contrast, Holthuijzen et al. (1990) found Prairie Falcon responsiveness to nearby blasting activity decreased as the nesting season progressed.

Few studies have documented the threshold distance that causes birds to flush in response to noise disturbance events. In those studies that reported stimulus distance, it was rare for birds to flush when the stimulus distance was greater than 60 m (Carrier and Melquist 1976; Edwards et al. 1979; Craig and Craig 1984; Pater et al. 1999; Delaney et al. 1999, 2000, 2001). Similar findings were

reported by Carrier and Melquist (1976) for Osprey (Pandion haliaetus), and by Ellis (1981) for Peregrine Falcons. Many disturbance studies report that animal response increases with decreasing stimulus distance (Platt 1977; Grubb and King 1991; McGarigal et al. 1991; Stalmaster and Kaiser 1997), though only a few studies have experimentally tested this relationship (Delaney et al. 1999, 2000, 2001; Pater et al. 1999). Delaney et al. (1999) found that the proportion of owls flushing in response to a disturbance was strongly and negatively related to stimulus distance and positively related to noise level. Spotted owls were not observed flushing when noise stimuli were more than 105 m from owl locations. Pater et al. (1999) and Delaney et al. (2000, 2001) found similar results when RCW were exposed to passive and experimental military training noise. Redcockaded Woodpeckers did not flush from the nest when: artillery simulator blasts were more than 152 m from nests; .50-caliber blank fire events were more than 152 m; military helicopters were more than 60 m; small-caliber live fire was more than 400 m; large-caliber live fire was more than 700 m; and when grenade simulators were over 200 m.

Even fewer examples exist for dose-response relations. Snyder et al. (1978) reported that Snail Kites (Rostrhamus sociabilis) did not flush even when noise levels were up to 105 decibels, A-weighted (dBA) from commercial jet traffic. This result was qualified by the fact that test birds were living near airports and may have habituated to the noise. Edwards et al. (1979) found a dose-response relationship for flush responses of several species of gallinaceous birds when approach distances were between 30 and 60 m and noise levels approximated 95 dBA. Brown et al. (1999) reported no difference in the frequency of Bald Eagle activity and nonactivity behaviors when noise levels were under 110 dBP (unweighted Peak) and over 110 dBP for either roosting or nesting eagles. Delaney et al. (1999) reported that Mexican Spotted Owls did not flush during the nesting season when the Sound Exposure Level (SEL) for helicopters was less than or equal to 102 owl-weighted, dBO (≤ 92 dBA) and the Equivalent Average Sound Level (LEQ) for chain saws was less than or equal to 59 dBO (≤ 46 dBA). Delaney et al. (2000, 2001) and Pater et al. (1999) developed noise response thresholds for RCW based on a number of military noise sources. Their preliminary results show that woodpeckers do not flush during the nesting season when the SEL for artillery simulators are less than 89 dB, unweighted (< 84 dBA); .50-caliber blank fire was less than 82 dB, unweighted (< 72 dBA); military helicopter overflights were less than 102 dB, unweighted (< 85 dBA); smallcaliber live fire events were less than 79 dB, unweighted (< 77 dBA); largecaliber live fire events were less than 103 dB, unweighted (< 85 dBA); and grenade simulators were under 91 dB, unweighted (< 84 dBA).

Distance has been described as the most commonly used surrogate for noise disturbance in the literature on animal response to noise, and has been proposed to be the best representative for quantifying the relationship between stimulus and response measures (Awbrey and Bowles 1990). The reason appears to be that distance is more conveniently implemented into management practices (i.e., establishing buffer zones) than other variables. However, use of a properly measured noise level as the stimulus measure facilitates broader application of response results, in particular to sources of similar aural character but different acoustic power emission.

No studies have specifically addressed the hearing sensitivity of Red-cockaded Woodpeckers. One project has studied the hearing sensitivity of the Downy Woodpecker (*P. pubescens*) as a surrogate for the RCW (Pater et al. 1999). The authors determined that RCW were most sensitive in the 1000-3000 Hz range. Sensitivity appears to drop off quickly at frequencies below 1000 Hz and above 4000 Hz (Pater et al. 1999). More research is needed to further test RCW hearing sensitivity at frequencies below 500 Hz.

3 Technical Approach

Null Hypotheses

Data collection, summary, and statistical analyses to assess and characterize military training noise in RCW groups, and to evaluate the relationship between noise levels and RCW demographic data, are based on the following formal null hypotheses:

- H_o: There is no difference in the nesting success, productivity, or nesting behavior between disturbed and undisturbed RCW groups.
- H_o: There is no relationship between stimulus distance or noise level and RCW response behavior.
- H_o: There is no difference in RCW response between types of training activities.

Study Area

Fort Stewart is located in southern Georgia (Figure 2), within Liberty, Long, Bryon, Tattnall, and Evans counties, and has the largest land area of any Army installation east of the Mississippi River. Fort Stewart lies within the Atlantic Coastal Flatwoods Province, within a humid, semi-tropical latitude, that averages 50 in. (127 cm) of rain per year. The average temperature in January is 62 °F (17 °C) with a relative humidity of 70 percent, while July averages 91 °F (33 °C) with a relative humidity of 76 percent (National Oceanic and Atmospheric Administration, http://www.noaa.gov/). Approximately 82.6 percent of the 279,081 acres on Fort Stewart is forested and cover four main forest types: upland pine stands composed primarily of longleaf (*Pinus palustris*), loblolly (*P. taeda*), and slash pine (*P. elliottii*); mixed pine-hardwood sites; upland hardwood management areas; and forested wetland areas. Only 49.1 percent of the installation is considered suitable or potential RCW habitat (Fort Stewart ESMPT 2001).

The primary mission of Fort Stewart is training and operational readiness of the 3rd Infantry Division (Mech.) and other non-division units. The 3rd Infantry Division (previously the 24th) was activated in 1975 and redesignated as a mechanized division in 1979 (Hayden 1997). Training activities are conducted year-

round at Fort Stewart to maintain a combat ready fighting force. The installation also supports training of regional National Guard and Reserve units, as well as joint training exercises with troops from other installations and DoD Branches (Fort Stewart ESMPT 2001). Fort Stewart contains a variety of impact and firing areas (Figure 3). The central feature of the installation is the Artillery Impact Area (AIA; about 5,200 ha), which is surrounded by dozens of artillery firing points varying in distance from a few hundred meters to thousands of meters from the impact area. On the western border of the AIA is the Red Cloud Complex, which contains eight separate ranges. Just south of the AIA is the Explosive Ordnance Disposal Area (EOD), the Demolition Area (DEMO), and the Small Arms Impact Area (13 live fire ranges, about 2,300 ha). To the east and northeast of the AIA are the CALFAX and Luzon Ranges, and three smaller Aerial Gunnery Ranges (AGRs). There are also seven drop zones located throughout the installation (Hayden 1997).



Figure 2. Location of Fort Stewart within the State of Georgia.

Sample Cluster Selection

There are currently 304 known RCW clusters (the aggregate of cavity trees used by a group of RCWs) distributed across Fort Stewart (Figure 3; Fort Stewart ESMPT 2001). No RCW groups are known to be in the AIA, though this area has not been ground surveyed due to safety concerns. Researchers classified RCW groups according to type and level of training noise based on: (1) number; 2) distance; and (3) noise level of stimulus events that each group typically receives. Three types of sample groups were chosen: passive disturbed; undisturbed; and experimental. "Passive disturbed" groups were those groups that

received potentially significant noise disturbance as part of normal training operations; there was no direct control over time, number, or level of noise events at these clusters.

Ft. Stewart Special Purpose Areas

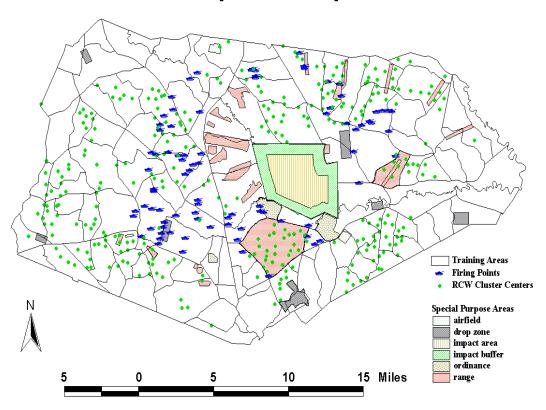


Figure 3. Locations of training areas and RCW groups on Fort Stewart.

Green dots represent RCW locations.

(Map developed by Ron Owens at the Fish and Wildlife Branch Office, Fort Stewart).

During the first field season in 1998, researchers selected 25 passive disturbed RCW groups and 16 undisturbed groups (i.e., control) out of 141 RCW groups that nested. In 1999, researchers selected 48 groups for experimental testing and 25 groups as controls out of 165 nesting RCW groups. An additional 14 RCW groups also were monitored for response to passive disturbance events (9 of 14 passive sample groups also were used in experimental testing). During the third and final field season in 2000, researchers selected 50 groups for experimental testing and 27 groups as controls out of 170 nesting RCW groups. Thirty-one RCW groups also were monitored for response to passive disturbance events (21 of 31 passive sample groups were also used in experimental testing).

The loudest and most prominent passive noise types on Fort Stewart were largecaliber live fire, small-arms live fire, and helicopter flights. Researchers attempted to choose RCW groups that received predominantly one type of noise, but this was sometimes impossible if they also used the highest noise level groups. "Undisturbed" or "low disturbance" RCW groups (the two terms are equivalent and are used interchangeably in this report) are groups where the noise levels were judged likely to be consistently low or absent for all of the noise types. Researchers documented sound levels, observed behavior, and measured nesting success at undisturbed groups as a baseline for judging impact at disturbed groups. It is likely that at least some level of military noise can be perceived at all RCW groups on Fort Stewart. The criterion for low disturbance is noise levels at or near ambient noise levels. At "experimental" RCW groups researchers exposed birds to either artillery simulators (Figure 4) or .50-caliber blank fire (Figure 5) under controlled conditions at distances of 15.2, 30.5, 45.7, 61.0, 76.2, 91.5, 121.9, 152.4 and 243.9 m from the nest tree (Tables C1 and C2, Appendix C).



Figure 4. Artillery simulator blast.



Figure 5. Soldier firing a .50-caliber machine gun with blanks.

Not all distances were tested for each noise source or RCW group because bird response dictated which distances would be used for developing a distance-response threshold. If RCW flushed during the initial experimentation, the test was ended for that day and the next scheduled test was initiated 15 to 30 m farther away to establish a distance-response threshold. If the initial test did not cause a flush, the next test about 2 to 3 days later was 15 to 30 m closer. Experimental groups were chosen from among RCW groups that had low to moderately low disturbance levels. This implies that woodpeckers in these groups were not habituated to the noise stimulus. Sample size was limited by the number of groups that fit protocol criteria and by available field observations.

Impact Measures

Selection of noise impact criteria is a critical issue. For humans the response criterion is typically annoyance. For domesticated species the issue may be damage to individual animals or impacts on profits. For TES, the ultimate concern is long-term survival of the species. The challenge is to develop a relatively short-term procedure for inferring impact on long-term survival. The conceptual approach used in this study (Figure 6) was developed by Tim Hayden at the Engineer Research and Development Center, Construction Engineering Research Laboratory. First, proximate responses to noise stimuli are measured. A proximate response is the direct and immediate response by the animal to a stimuli; for example a behavioral (flight) or a physiological (change in heart rate) response. Next, researchers examine whether the stimulus that elicited the proximate response affects "individual fitness," which is typically evaluated in

terms of adult and juvenile mortality or reduced reproductive fitness. Mortality and reproductive fitness rates are established by field monitoring of many individuals throughout the nesting season. Population effects can be inferred from measures of individual fitness by application of Population Viability Analysis (PVA) models. Current applications of PVA do not capture the temporal and spatial variability of training events, and thus cannot model the resulting effects on endangered species' demographic parameters. Researchers at ERDC/CERL are currently developing PVA modeling approaches capable of capturing training effects in predictive population models. This is a shared effort under this project and a related ERDC/CERL research effort to evaluate effects of maneuver training (vehicles and troops) on RCW (Hayden et al. 2002).

In summary, the research paradigm is that proximate effects can be linked to individual fitness, which in turn can be linked to population effects. As a specific example, consider that a bird might flush from a nest (a proximate response) in response to a noise event. It is possible that this could lead to nest failure, especially if the noise and flush response occurred repeatedly. Monitoring is required to determine nesting success of disturbed and undisturbed nests. A population model is required to determine if such failure of some percentage of nests has an effect on survival of the population.




Figure 6. Assessment hierarchy for training impact on threatened and endangered species.

Behavior and Proximate Response Measurement Protocols

The research team documented RCW behavior at low and high noise disturbance nest sites by direct observation and through video surveillance. They divided the nesting cycle into three stages: incubation (eggs present from nest day 0 to 11); brooding (adult RCW attend young chicks between 0 and 4 days old to assist

with thermoregulation: nest days 12 through 15); and nestling (larger chicks typically unattended for long periods of time in nest: nest day 16 until fledging, around nest day 37 to 40). A "data session" consisted of behavioral observations of at least one adult RCW, typically for 1 hour or longer. At disturbed RCW groups researchers attempted to observe behavior for at least 30 minutes before and after each noise event. This was sometimes not possible for passive disturbed groups because noise events were so frequent that researchers could not document undisturbed behavior for extended periods of time.

To evaluate RCW baseline behavior and responses to military training activities, researchers measured several parameters (behavior categories):

- 1. Alert RCW moves to the cavity entrance, head movements, orient to noise source.
- 2. Flush from nest RCW departs from the nest cavity in response to the stimulus, and remains away from the nest for a measured period of time.
- 3. Return time length of time an adult is away from the nest cavity after being flushed.
- 4. Nest attentiveness proportion of time that adult RCWs spend attending the nest cavity through the nesting season (calculated for diurnal, 24-hour periods, and for the incubation and nestling phases).
- 5. Prey deliveries number and rate of prey deliveries to the nest cavity.
- 6. Trips number and duration of times the attending adult left the nest cavity.

Due to the amount of video data that was collected over the 3 years of this study (more than 10,000 hours on 35 RCW groups), behavior categories 4 through 6 are not fully analyzed and therefore will not be presented in this report. These data will appear in a separate report and will also be developed into manuscripts for submission to professional peer-reviewed journals in 2003.

Demographic and Nesting Success Data

RCW demographic data (population size, growth, density, and distribution) were collected in accordance with established protocols used by the Fort Stewart Fish and Wildlife Branch. Demographic data included the following parameters for each RCW group:

- 1. Cluster occupancy cluster occupied by one or more RCWs. Most individuals are identified by unique leg band combinations (provides a measure of population size, growth, and stability).
- 2. Mated status presence of both an adult male and an adult female RCW.
- 3. Active nest at least one egg was laid.

4. Nesting success - at least one fledgling was produced (provides a measure of the proportion of RCW groups that are reproductively successful).

- 5. Nesting productivity number of young fledged per nest (provides a measure of fecundity).
- 6. Number of eggs produced.
- 7. Number of nestlings hatched.
- 8. RCW group size (provides a possible measure of territory quality and availability).

These data enable several trends to be detected:

- 1. Reproductive loss mortality rate of eggs, nestlings, and fledglings during nesting.
- 2. Annual nest re-occupancy rates provides a potential measure of RCW response to disturbance. Sites with heavy disturbance levels may be abandoned in subsequent years in favor of other sites further from specific disturbances.
- 3. Site tenacity turnover rate of adult and helper RCW within a cluster across years.
- 4. Nesting success rates for disturbed and undisturbed RCW groups.
- 5. Mean number of young fledged for disturbed and undisturbed RCW groups.
- 6. Mean clutch and brood size for disturbed and undisturbed RCW groups.
- 7. Reproductive potential total number of young that could be produced if all eggs and nestlings survived to fledge successfully.

The majority of demographic data for RCW groups was collected by Department of Public Works (DPW) Fish and Wildlife personnel from Fort Stewart. Each active (at least one RCW present) RCW group was initially visited to determine occupancy. Adult RCW were banded to determine group size and affiliation using methods similar to Walters et al. (1988). A 25-percent random sample of all RCW groups was then monitored approximately every 7 to 9 days to record clutch and brood size (Fort Stewart ESMPT 2001). Nestlings were uniquely color-banded approximately 5 to 10 days after hatching. Groups were visited 20 to 25 days after nestlings were banded to determine the number and sex of fledglings (Walters et al. 1988). The 25-percent sample included many of the research sample groups. Researchers augmented the DPW Fish and Wildlife sample by monitoring demo-graphic data (particularly the number of young fledged) for additional RCW groups to provide more complete coverage of the sample groups.

Video Surveillance

Video cameras were used as a means to record RCW behavior over prolonged periods, to reduce costs, and to avoid potentially disruptive effects of human pres-

ence. The camera systems also documented response in areas that could not be safely monitored (e.g., downrange from firing positions). Cameras were attached to tree trunks with adjustable, jointed angle-brackets and screws. Cameras were mounted at the same level or slightly above nest height in the nearest practical tree and at least 5 m from the nest tree so as not to disturb incubating woodpeckers. The solid state, 12-volt, flexible circuit-board, black and white cameras were equipped with 12.0-mm lenses; the color cameras had 75-mm lenses. The cameras provide a minimum of 380 lines of resolution and have a minimum sensitivity of 0.45 Lux. Black and white cameras were mounted in waterproof heavy-gauge plastic switch boxes with transparent covers (12.9 x 6.7 x 4.1 cm), which were painted black, except for the lens and LED (light-emitting diode) area. Color cameras were housed in metal weatherproof containers (30 x 9.7 x 9.0 cm). Two ports are threaded into the protective housing: one for the power supply and the second for the video signal (Delaney et al. 1998). Power and coaxial cables were attached to a DC (direct current) monitor and battery so camera placement could be directed from the base of the camera tree. At least two people were required for camera placement: a climber to position the camera and a person on the ground to check the video signal and placement. Then a trunk line was attached at the base of the tree (covered by a camouflaged 1.2 cm diameter hose for protection against rodents), allowing the power/recording station to be placed between 30 and 60 m from the tree to minimize potential disturbance to the woodpeckers. Panasonic Model AG-1070DC Professional/Industrial VHS video recorders, connected to cameras via coaxial cable (RG-59), provided approximately 24 to 32 hours of coverage per tape. These 12-volt, DC-powered recorders were designed for surveillance applications. Cameras and video recorders were powered by two 12-volt, 33.0-amp-hour, Power-Sonic Model PS-12330 sealed rechargeable batteries connected in parallel (a 24-hour taping would draw a single battery below operational limits). These "gel-cell" type batteries (weighing 11.3 kg each) reduce the risk of battery damage and eliminate the potential for spillage during backpack transport. Researchers put the recorder, twin batteries, and all connectors inside a weatherproof bin concealed under a camouflaged tarpaulin. Freshly recharged batteries were used for each set of recordings. The team did not observe any nest abandonment due to camera placement.

Sound Instrumentation and Recording

Sony TCD-D8, Digital Audio Tape (DAT) recorders were used to continuously record all noise events, along with the exact time and date. Bruel & Kjaer (B&K) Type 4149 1.3 cm Condenser Microphones with 7.5 cm wind screens were attached to B&K Model 2639 Preamplifiers. Each microphone was mounted on a

1-m stick and placed directly under a woodpecker's nest about 1 m from the tree trunk. The power supply and DAT recorder were also placed at the base of the nest tree in a small camouflaged container. A 1.0-kHz, 94-dB calibration signal (20 micropascals reference) from a B&K Type 4250 Sound Level Calibrating System was recorded before and after each noise event recording. This signal provides a reference for sound levels and spectra when data are later analyzed using a B&K Type 2144 Frequency Analyzer. All noise data were analyzed at ERDC/CERL. In addition to recording noise levels at the base of the nest tree, noise levels within cavities were also recorded after the nesting season.

Sound Metrics

Noise is defined as sound that is undesirable or constitutes an unwarranted disturbance, and can alter behavior or normal functioning (ANSI S1.1-1994). The types of military noise that are within the scope of this study vary widely in instantaneous transient amplitude, duration, spectral energy content, and suddenness of onset. Appropriate noise metrics and frequency weighting are essential to adequately quantify the noise impact for each type of noise. Noise metrics are chosen to measure the noise dose in a way that meaningfully correlates with subject response. Frequency weighting is an algorithm of frequency-dependent attenuation that simulates the hearing sensitivity and range of the study subjects. Frequency weighting discriminates against sound that, while easily measured, is not heard by the study subjects. The current project requires specialized metrics and techniques to meaningfully measure noise impacts on animals. The paradigm is to measure noise events in terms of unweighted one-third-octave band levels, apply frequency weighting to the resultant spectra, and calculate appropriate overall metrics.

Only noise that is audible to the study species should be accounted for in the metric used to quantify noise level. Frequency weighting designed for humans may not be appropriate for animal species. The commonly used "A" frequency weighting (ANSI S1.4-1983) attenuates noise energy according to human hearing range and sensitivity. For human response to blast noise, "C" frequency weighting is often applied to received blast noise signals, rather than "A" weighting, which is more representative of human hearing response (ANSI S1.4-1983). This is done to retain low frequency energy that, while not heard by humans, causes a secondary rattle in buildings, which does evoke response (ANSI S12.4-1986). This is not appropriate for most wildlife. An audiogram, which describes hearing range and sensitivity, provides guidance regarding appropriate frequency weighting for the species of interest and aids in interpretation of noise response data (Appendix B). A literature search and consultation with several leading

experts on bird hearing failed to find an audiogram for the RCW or for any species in the order, Piciformes. Thus, as part of this project the research team obtained a preliminary woodpecker audiogram that was used to develop a frequency weighting function. Figure 7 shows the woodpecker audiogram (Pater et al. 1999), a composite average audiogram of seven orders of birds (Dooling et al. 2000), with an approximate representation of a human audiogram. The differences are substantial. The owl audiogram further illustrates how audiograms can vary among species (Delaney et al. 1999). Additional information on the current RCW audiogram work can be found in Pater et al. (1999).

It is well established (ANSI S12.40-1990; S12.9-1996; S12.17-1996; Homans 1974; National Academy of Sciences 1977, 1981; Rice 1983; Rice et al. 1986; Schomer et al. 1994) that the appropriate metric for blast noise is SEL, which is essentially the time integral of the square of the acoustic pressure. The research team measured blast noise as unweighted one-third-octave band SEL, to which they applied appropriate frequency weighting for the RCW, to obtain woodpecker weighted noise levels (dBW). The same metric and procedure was also used with small arms noise (Buchta 1990; Hede and Bullen 1982; Hoffman et al. 1985; Luz 1982; Sorenson and Magnusson 1979; Vos 1995). Two metrics, the SEL and the maximum 1-second equivalent average (LEQ) level, were used for helicopter noise, airplane noise, and vehicle pass-by noise, since both are meaningful in terms of correlation with response (Environmental Protection Agency [EPA] 1974, 1982; Federal Interagency Committee on Urban Noise [FICUN] 1980; Fidell et al. 1991; Schomer 1994; Schultz 1978; U.S. Code of Federal Regulations 1980). Ambient noise was measured as LEQ for various appropriate time periods (EPA 1982). In all cases, the noise signals were recorded on digital audio tapes and preserved for possible further analysis.

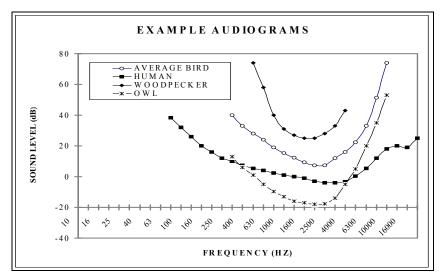


Figure 7. Examples of audiograms and frequency weighting. Average bird audiograms are from Dooling et al. (2000); owl audiogram were developed by Delaney et al. (1999) based on data from Trainer (1946) and Konishi (1973); woodpecker audiogram was by Lohr et al. reported in Pater et al. (1999); and Human audiograms are based on the ANSI standard (1969).

Statistical Data Analysis

The research team used SPSS 8.0 for Windows (SPSS Inc. 1998) to perform all descriptive statistics; for example, one-way ANOVA for comparing the mean number of eggs, nestlings, and young fledged between the first and second nesting attempts and for comparing noise levels between stimulus type, year, and distance. Independent sample t-tests were used to compare nest productivity data between experimental and control sites. Whenever appropriate, multiple observations at single nests were averaged before inferential tests were performed so that the sample sizes are the number of nests examined. A 1-tailed Fisher Exact Test was used to assess 2x2 contingency tables for variability in nesting success between disturbed and undisturbed nest sites (Zar 1984). Researchers used Sample Power 1.0 to conduct power analyses (Borenstein et al. 1997). Alpha levels of 0.05 will be required to reject a null hypothesis for all tests. Means ± standard error (SE) are presented throughout this document.

4 Results

Initiation Dates for Each Nesting Phase

The first woodpecker clutches were initiated in 1998 through 2000 on approximately 10 April through 3 June, while secondary clutches (RCW groups that renested after initial nest failure) were initiated on 2 May through 15 June. Third clutches were initiated on 16 May through 23 May 1999. Eggs from initial nesting attempts hatched on approximately 23 April through 16 June, while eggs from second nesting attempts hatched on 13 May through 27 June. Eggs from third nesting attempts hatched on approximately 5 June through 3 July. Young fledging from initial nesting attempts were observed on 20 May through 12 July, and from 8 June through 22 July for fledglings from secondary nesting attempts. Third nesting attempts fledged on approximately 21 June through 9 July. There were no third nesting attempts observed during 1998 or 2000, only during the 1999 nesting season.

Overall Population Dynamics

The total number of potential breeding RCW groups on Fort Stewart increased from 165 in 1998 to 174 in 1999 to 181 in 2000, for an overall increase of 9.7 percent. The number of nesting RCW groups increased from 141 in 1998 to 165 in 1999 to 170 in 2000, for an overall increase of 20.6 percent. Overall fledging success rates remained consistent over the 3 years of this study (84.4 percent; range of 79.4 to-87.7 percent). Approximately a quarter of all RCW groups from 1998 through 2000 (25.3 percent; range 20.6-28.5 percent) failed in initial nesting attempts; 62.8 percent (range of 54.3-70.2 percent) of these RCW groups renested within the following 2 weeks. Groups that renested were as successful and productive as groups that nested only once during each year of this study (Pater et al. 1999, Delaney et al. 2000, 2001). Fitness data from initial nesting attempts and renesting attempts were pooled to determine mean fitness rates for the overall RCW population each year.

Clutch sizes for RCW groups from 1998 through 2000 ranged from 2.75-3.01 eggs/nest; brood size ranged from 2.01-2.22 nestlings/nest; and the average number of young fledged ranged from 1.57-1.76 young/occupied nest (range of 1.83-

2.04 young/successful nest). Occupied nests include successful and unsuccessful groups, while successful nests include only groups that successfully fledge at least one young. The number and proportion of male and female fledglings varied each year. The approximate number of young fledged each year on Fort Stewart ranged from 200 in 1998 to 290 in 1999, to 279 in 2000. These numbers were comparable to fledge rates in 2001 (272 young fledged) when no experimental noise testing occurred. RCW groups fledged a slightly higher proportion of males than females in 1998 (53.5 percent) and 1999 (53.1 percent), while a reverse pattern was observed in 2000 (46.2 percent) and 2001 (47.4 percent), when slightly more females fledged than males.

There was a significant reduction in the reproductive potential (i.e., total number of young produced if all eggs and nestlings survive to fledge) of RCW nests from the incubation phase to the nestling phase across all 3 years of this study (range 35.9-38.7 percent; Pater et al. 1999; Delaney et al. 2000, 2001). The decline between nestling and fledgling phases was not as dramatic each year, but was still significant in 1998 and 1999 (range 10.3-16.9 percent). Overall, researchers observed a significant decline in the reproductive potential from incubation through the fledgling phase from 1998 through 2000 (range from 45.7-53.2 percent; Pater et al. 1999, Delaney et al. 2000, 2001).

Sample Group Population Dynamics

Of the 58 experimental RCW groups that received disturbance testing in 1999 and 2000, 83.3 percent of the 96 nesting attempts were successful in fledging young. Twenty-eight of these 96 nesting attempts initially failed. Sixteen of the 28 RCW groups that initially failed during their first nesting attempt were found renesting within the following 2 weeks, with 68.8 percent successfully fledging young. Experimental RCW groups that renested were as successful (Fisher Exact Test, P = 0.08; 68.8 percent for groups that renested versus 85.0 percent for initial nesting attempts) and productive as groups that nested only once. Experimental groups that nested only once nested successfully in 68 of 80 nesting attempts and produced an average of 3.06 ± 0.09 eggs/nest, 2.16 ± 0.12 nestlings/nest, and 1.81 ± 0.12 young/occupied nest (2.12 ± 0.10) young/successful nest). In comparison, groups that renested were successful in 11 of 16 nesting attempts and produced an average of 2.75 ± 0.19 eggs/nest, 1.75 ± 0.19 nestlings/nest, and 1.25 ± 0.23 young/occupied nest (1.82 \pm 0.12 young/successful nest). Researchers observed no significant difference in the number of eggs ($F_{1.94}$ = 0.42, P = 0.15), number of nestlings ($F_{1,94} = 2.92$, P = 0.14) or the number of fledglings ($F_{1.94} = 0.07$, P = 0.053) between groups that renested and groups that

nested only once. Therefore, data were pooled before determining overall sample group fitness rates.

Of the 34 RCW control groups monitored in 1999 and 2000, 88.9 percent of the 54 nesting attempts made by these groups were successful in fledging young. Fourteen of these 54 initial nesting attempts failed. This was not significantly different from initial failure rates for experimental RCW groups (Fisher Exact Test, P = 0.14). Ten of the 14 RCW groups that initially failed to nest renested within the following 2 weeks, with 80.0 percent successfully fledging young. Control groups that renested were as successful (Fisher Exact Test, P = 0.24; 80.0 percent for groups that renested versus 88.9 percent for initial nesting attempts) and productive as groups that nested only once. RCW groups that nested only once were successful in 44 of 54 nesting attempts and produced an average of 2.93 ± 0.10 eggs/nest, 2.18 ± 0.11 nestlings/nest, and 1.82 ± 0.12 young/occupied nest (2.12 ± 0.10 young/successful nest). In comparison, RCW groups that renested were successful in 8 of 10 nesting attempts and produced an average of 2.80 ± 0.36 eggs/nest, 1.90 ± 0.38 nestlings/nest, and 1.80 ± 0.39 young/occupied nest (2.25 ± 0.31 young/successful nest). Researchers observed no significant difference in the number of eggs ($F_{1.52} = 4.78$, P = 0.64), number of nestlings ($F_{1.52} = 4.79$, P = 0.33), or the number of fledglings ($F_{1.52} = 6.33$, P=0.95) between groups that renested and groups that nested only once. Therefore, data were pooled before determining overall sample group fitness rates.

Overall, experimental RCW groups produced an average of 2.98 ± 0.07 eggs/nest, 1.89 ± 0.11 nestlings/nest, and 1.54 ± 0.12 young/occupied nest, while control groups produced an average of 2.73 ± 0.11 eggs/nest, 1.91 ± 0.13 nestling/nest, and 1.57 ± 0.13 young/occupied nest. The proportion of experimental nesting attempts that was successful (81.3 percent) was not significantly different from the proportion of control nests (85.2 percent) that successfully nested (Fisher Exact Test, P = 0.12). Experimental and control RCW groups did not differ significantly in number of eggs ($F_{1,90} = 4.16$, P = 0.058), number of nestlings ($F_{1,90} = 1.06$, P = 0.88) from 1999 to 2000.

Researchers also compared 1999 and 2000 fitness data from experimental groups with 2001 fitness data for these same RCW groups, when no experimental testing occurred. They found no significant differences between the proportion of RCW groups that initially failed in their nesting attempts (Fisher Exact Test, P = 0.20) or the proportion of renesting groups that nested successfully (Fisher Exact Test, P = 0.25) between experimental test years (1999 and 2000) and 2001 that did not received any experimental testing. They found no significant difference in the number of eggs ($F_{1,90} = 5.43$, P = 0.86), number of nestlings ($F_{1,90} = 5.43$).

5.69, P = 0.41), or the number of fledglings ($F_{1,90} = 2.61$, P = 0.72) between experimental test years and post year fitness data.

Power analysis

Based on a preliminary power analysis in 1998, the researchers estimated a group size of 95 experimental and 95 control RCW groups would be necessary to reach an adequate power level of 0.80 (Figure 8). The power analyses in 1999 and 2000 showed only a 0.33 to 0.41 probability of detecting a 25 percent decrease in reproductive productivity in control nest sites (Alpha level of 0.05; 2 -tailed test). Power decreased to 0.23 to 0.29 for detecting a 20 percent decrease in reproductive productivity, to 0.15 to 0.18 for a 15 percent decrease, and down to 0.09-0.11 for detecting a 10 percent decrease in reproductive productivity between disturbed and control RCW groups.

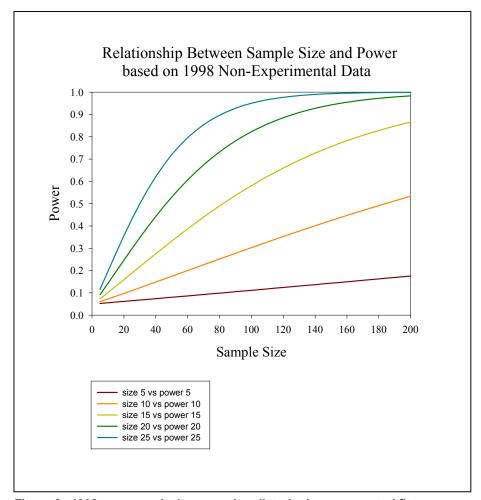


Figure 8. 1998 power analysis comparing disturbed versus control fitness parameters.

Noise and Response Monitoring Summary

During the 1999 and 2000 field seasons, the research team documented RCW response to experimental noise from controlled .50-caliber blank fire and artillery simulators. Passive noise from large-caliber live fire (20-mm M2A2 Bradley Fighting Vehicles, 120-mm M1A1-Tanks, and 155-mm M109 Howitzers), small-arms live fire (5.56-mm M-16 and Saw, 7.62-mm, and .50-caliber machine guns), grenade simulators, military helicopters, military vehicles, MLRS, Stinger/Drone Missiles, and fixed-wing aircraft was recorded as it occurred from 1998 through 2000. Passive noise was monitored during all nesting phases, while experimental tests were performed only during the incubation and early portions of the brooding phase when adults were present at the nest for extended periods of time.

The researchers made noise measurements and behavioral response observations at a total of 58 experimental and 50 passive sample groups. Detailed results are described below and are presented in data tables and figures in Appendices C and D, respectively. The tables of Appendix C present summaries of the noise level measurements and RCW responses for each of the noise sources recorded. Typical spectra for the most prevalent noise sources are presented in Appendix D. Noise level summaries for each noise stimulus type and detailed noise measurements in terms of one-third-octave band SEL levels are reported in previous RCW reports (Pater et al. 1999; Delaney et al. 2000, 2001). The researchers also monitored 40 undisturbed sample clusters for the purpose of obtaining baseline behavioral information against which to judge proximate response at the disturbed groups.

Passive monitoring

Researchers recorded 2,846 passive noise events in 157 data sessions at 50 RCW groups during 1998 through 2000. Small-caliber live fire events (M-16 rifles and .50-caliber machine guns) were recorded most frequently, followed by large-caliber live fire events (greater than 20-mm), missiles (MLRS and Stinger/Drone), helicopters, vehicles, simulators, and fixed-wing aircraft. Multiple noise events and stimulus types were usually recorded during each passive data session. Stimulus type, noise of disturbance events, and noise level varied for each RCW group (Tables C1-C10, Appendix C).

Distance and Noise Level Thresholds for Response

Experimental tests

In 1998, the research team exposed four RCW groups to small-arms blank fire (5.56 mm M-16) fired at a distance of 15.2 m from the nest tree during a 5-minute period. Due to logistical constraints, only one test was conducted at each RCW nest site during 1998 (Table C9, Appendix C). In 1999 and 2000, the team conducted 206 experimental tests at 58 RCW groups (37 groups received artillery simulator testing, while 38 received .50-caliber blank fire testing; Tables C1 and C2, Appendix C; noise spectral examples Figures D1 and D2, Appendix D). Some RCW groups received testing from both experimental noise types, though only one noise type was tested per nesting season, except Cluster 81 in 2000. Cluster 81 received both .50-caliber blank fire and artillery simulators in 2000, with only one noise type per test during each of two nesting attempts. The first nesting attempt at cluster 81 failed, while the second was success in fledgling two young.

Artillery simulators

As stimulus distance decreased, RCW flush frequency increased (Figure 9), regardless of stimulus type or year (Tables C1 and C2, Appendix C). Woodpeckers did not flush from nests when artillery simulator blasts were more than 152.4 m away and SEL noise levels were less than 65 dBW (72 dB, unweighted). Only one flush response was documented at a distance of 121.9 m (Table C1, Appendix C). Woodpeckers returned to their nests on average within 4.4 minutes after being flushed, while returning no later than 16.2 minutes overall (Figure 10).

.50-caliber blank fire

The team recorded two flush responses due to .50-caliber blank fire at 121.9 m (Table C2, Appendix C). They tested RCW response to .50-caliber blank fire at distances greater than 121.9 m and did not observe any flush responses at distances of 152.4 or 243.8 m. At distances less than or equal to 122 m, .50-caliber blank fire elicited a higher proportion of flushes (51.5 percent) than comparably distant artillery simulators (43.3 percent; Appendix C: Tables C1 and C2), though this difference was not significant (Fisher Exact Test; P = 0.057). Woodpeckers did not flush from the nest when .50-caliber blank fire events were more than 152.4 m away and SEL noise levels were less than 68 dBW (80 dB, unweighted). Woodpeckers returned to nests on average within 6.3 minutes after being flushed, while returning no later than 26.8 minutes overall. Researchers found no relationship between return time and stimulus distance (Figure 10).

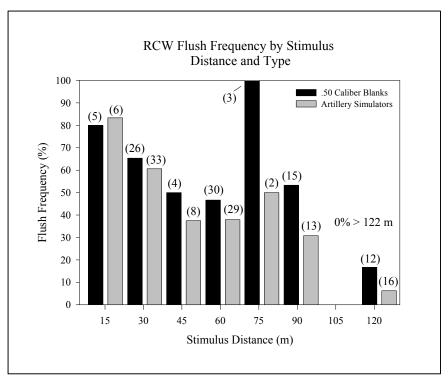


Figure 9. RCW flush frequency by stimulus type and distance. Numbers in parentheses represent the number of RCW groups tested at each distance.

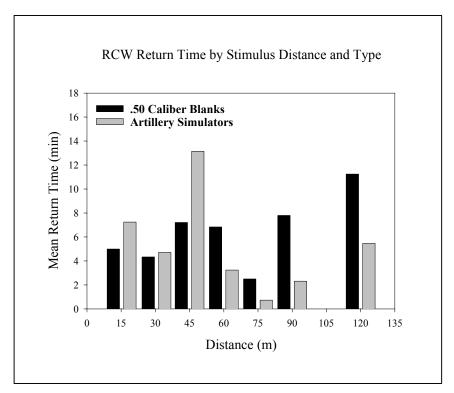


Figure 10. Mean return time for RCW in response to experimental testing in 1999 and 2000.

Dose-response relationship

The research team averaged noise levels across categorical stimulus distances for .50-caliber blank fire events and artillery simulators to illustrate the proportion of woodpecker flush responses as a function of noise level and stimulus distance. The data are shown in Figures 11 and 12. The noise levels are based on woodpecker weighting curves. Both figures show that the flush frequency increases rapidly with increasing noise level and when stimulus distances were less than or equal to 121.9 m, with the .50-caliber blank fire curve rising more abruptly than artillery simulators overall. Mean noise levels were more variable during artillery simulator tests than .50-caliber blank fire events across years (Figures 11 and 12). On average, .50-caliber blank fire events ranged from 42 dBW at 243.9 m up to 92 dBW at 15.2 m from RCW nest trees, while artillery stimulators, on average, ranged from 67 dBW at 152.4 m to 86 dBW at 30.5 m from RCW nest trees (Figures 11 and 12).

Passive events

Small-caliber live fire

Only one RCW group (cluster 103) monitored between 1998 and 2000 received small-caliber live fire noise at distances less than 400 m. Noise levels in cluster 103 were louder than in other clusters due to supersonic bullet noise and ricocheting bullets hitting trees in close proximity to the nest tree (M-16 range – Golf; example of noise spectral data: Figure D3, Appendix D). The other 11 clusters monitored for passive small-caliber noise were much further downrange or were positioned behind the firing lines compared with cluster 103, and therefore received substantially lower noise levels (Table C3, Appendix C). RCW groups in live fire ranges were monitored remotely via video cameras that were synchronized with audio recording equipment.

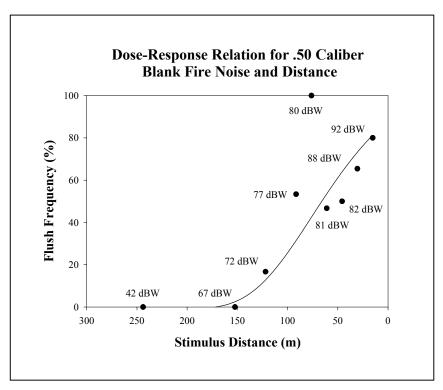


Figure 11. Dose-response relation between .50-caliber blank fire events and distance for RCWs on Fort Stewart in 1999 and 2000.

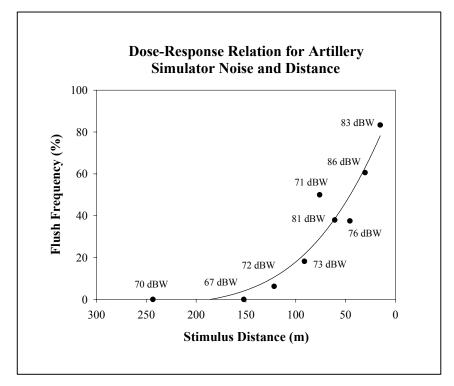


Figure 12. Dose-response relation between artillery simulator blast events and distance for RCWs on Fort Stewart in 1999 and 2000.

Woodpeckers did not appear to flush in response to small-caliber noise at cluster 103, though their flight activities may have been influenced. On 3 separate days, over a 6-day period in 1999, woodpeckers were observed arriving and departing from the nest only during inactive firing periods on the range (Figures 13) through 15). Data points for Figures 13 through 15 represent individual bullet noise events or groups of muzzle blast events that are separated in time from other shots. Noise events were separated into bullet noise (located between the range and RCW location) or muzzle blast (located at firing range) categories in Figures 13 through 15. Red lines represent RCW arrivals and blue lines represent departs from the nest. Noise levels from supersonic bullets and ricocheting bullets were substantially louder than rifle muzzle noise coming from the range (Figure 16). Each noise event in Figures 13 through 15 are quantified in terms of unweighted and woodpecker weighted (dBW) metrics. Events with equal "W" weighted and unweighted levels, or where "W" weighted levels are higher than unweighted values, represent supersonic bullet noise (approximately 78 dB, unweighted or higher; Figures 13 through 15). Events with "W" weighted levels below unweighted levels (< 78 dB, unweighted) represent muzzle blast noise from ranges. Supersonic bullet noise was 20 to 25 dBW louder than muzzle blast noise within the 1 to 4 kHz frequency range when peak levels for both noise types were compared (Figure 16). Supersonic bullet noise represented 19 percent (284 noise events, Table C3, Appendix C) of the noise events that were recorded at cluster 103. Cluster 103 successfully fledged two young in each year that nesting success was monitored (1999 and 2000).

The research team recorded 1930 small-arms live fire noise events during 29 data sessions at 14 RCW groups during 1998-2000 (Table C3). They did not observe any flush responses to passive small-arms live fire at documented noise levels and stimulus distances. RCW did not flush from the nest when small-arms live fire events were more than 400 m from active RCW nests and SEL noise levels were less than 51 dBW (76 dB, unweighted; Table C3). Small-arms live fire events at less than 200 m did not represent muzzle noise from the rifles, but were from supersonic bullet noise. The team was not able to determine the exact distances that bullets were hitting surrounding trees, but due to the received noise levels and characteristics and the fact that bullets are lodged in nearby trees, distances appear to be relatively close. Rifle noise from Small Arms - Golf M-16 range was approximately 430 m from the nest (example of noise spectral data: Figure D4, Appendix D). Researchers did not locate any other active RCW nests less than 400 m from any small-arms ranges to which they had access for testing.

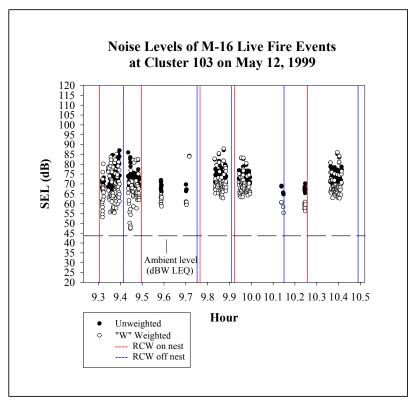


Figure 13. Noise levels from M-16 live fire events at cluster 103 on 12 May 1999.

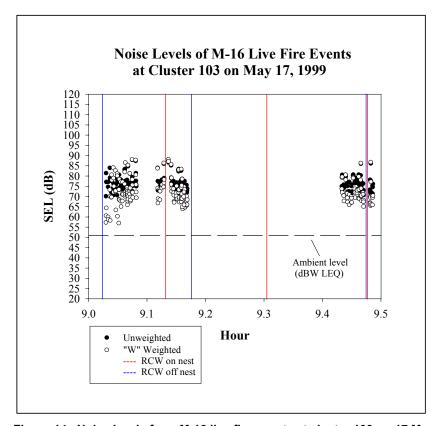


Figure 14. Noise levels from M-16 live fire events at cluster 103 on 17 May 1999.

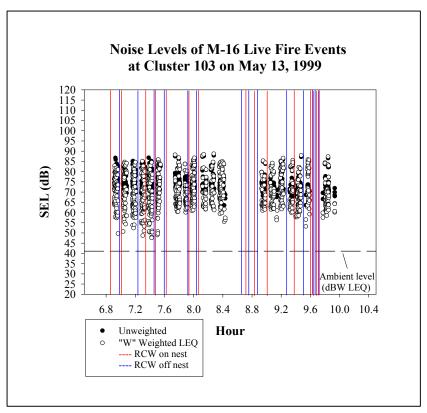


Figure 15. Noise levels from M-16 live fire events at cluster 103 on 13 May 1999.

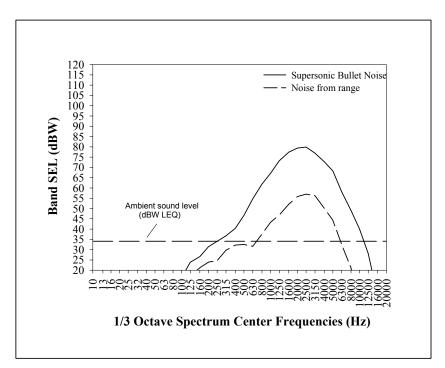


Figure 16. SEL weighting comparison for M-16 live fire events on 17 May 1999, from supersonic bullet noise and muzzle blast noise near cluster 103.

Helicopters

The research team recorded 83 helicopter passes during 45 data sessions at 19 RCW groups from 1998 through 2000 (Table C4, Appendix C). More than twice the number of helicopter events and data sessions were recorded during the 2000 field season than during 1998 and 1999 combined. The team did not observe any flush responses by RCW relative to documented noise levels and stimulus distances. RCW did not flush from the nest during the incubation or early brooding phase when military helicopters were more than 30 m from nests and SEL noise levels were less than 84 dBW (102 dB, un-weighted; Table C4, Appendix C; example of noise spectral data: Figure D5, Appendix D).

Large-caliber live fire

Woodpeckers flushed twice in response to large-caliber (bigger than 20-mm) blast noise in 1998 through 2000. Both flush responses occurred at cluster 83 in close artillery blast noise events. This site received the highest passive noise levels of any RCW group monitored. On 20 May 1998, researchers recorded 13 artillery blasts (155-mm rounds) during one data session at cluster 83. Figure 17 shows blasts one through eight in both W-weighted and unweighted SEL. The attending adult flushed from the nest in response to the loudest blast event recorded during that data session (7th of 13 blast events recorded; SEL = 77 dBW, [108 dB, unweighted]). The RCW returned to the nest after 6.25 minutes and did not flush in response to a subsequent blast of approximately equal noise level. On 21 May 1998, researchers recorded 60 artillery blast events during another data session at cluster 83. This time the attending adult flushed in response to the 52nd blast event during that data session, returning to the nest after 4.42 minutes, shortly before the last noise event recorded occurred during that data session (Figure 18). Blast event number 52 was one of the louder blasts of the day with an SEL noise level of 79 dBW (105 dB, unweighted).

The team recorded 630 large-caliber blasts/impacts during 45 data sessions at 24 RCW groups from 1998 through 2000 (Table C5, Appendix C; example of noise spectral data: Figure D6, Appendix D). Woodpeckers did not flush when large-caliber guns were fired at distances more than 700 m from nests and SEL noise levels were less than 59 dBW (102 dB, unweighted; Table C5). Woodpeckers flushed from nests in response to large-caliber blasts between 500 and 600 m from nests (1998). The team did not record any large-caliber gun fire less than 500 m from any active RCW nest site; therefore, they could not test for response within that range.

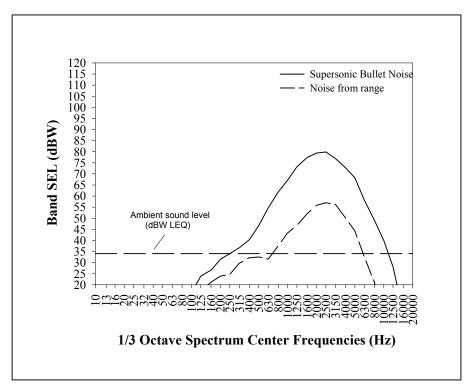


Figure 17. Description of RCW flush response to artillery blast events at cluster 83 on 20 May 1998.

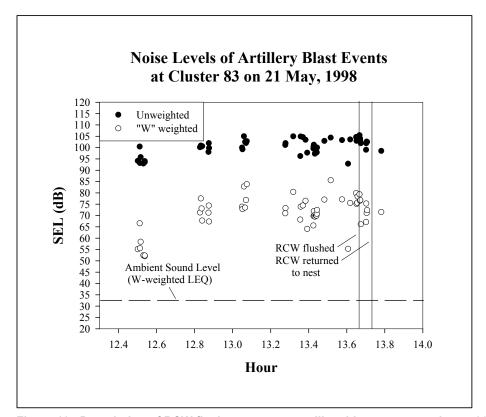


Figure 18. Description of RCW flush response to artillery blast events at cluster 83 on 21 May 1998.

Military/civilian vehicles

The research team recorded 81 military/civilian vehicle passes during 22 data sessions at 15 RCW groups from 1998 through 2000 (Table C6). Woodpeckers flushed twice in response to vehicle noise during this time period. These flush events occurred at clusters 216 and 23 in response to a Bradley Fighting Vehicle convoy and a civilian vehicle, respectively. At cluster 216, a convoy of 17 Bradley Fighting Vehicles passed within 30 m of the nest tree, which elicited a flush response by the attending adult. An RCW returned to the nest in 10 minutes, after the convoy had passed. This site successfully fledged one young. The noise spectral data for a small portion of this event is in Figure D7 (Appendix D). The second flush occurred at cluster 23 as a civilian vehicle passed 15 m from the nest tree. A bird returned to the nest within 3 minutes after the flush had occurred. This site failed during this first nesting attempt, but did successfully fledge one young during a second nesting attempt. The noise spectral data for this event is shown in Figure D8 (Appendix D). Overall, RCW did not flush when vehicles were more than 50 m from nests and SEL noise levels were below 55 dBW (75 dB, unweighted; Table C6).

Missiles

Researchers were able to record RCW response at the nest for only one MLRS event at cluster 88 during the early brooding phase. This noise event did not elicit a flush response. All other missile recordings occurred prior to nesting or during the nestling phase (Table C7, Appendix C). An example of noise spectral data for missiles are shown in Figure D9 (Appendix D). Missile events shown in Table C7 at distances under 1000 m represent MLRS noise events, while distances over 2000 m represent Stinger/Drone Missile noise events (examples of noise spectral data: Figures D10 and D11, Appendix D). Researchers were unable to test for RCW flush response at clusters 83 and 99 because it was late in the nestling phase and adults were not spending long periods of time at the nest (Table C7). RCW did not flush when MLRS were fired more than 750 m from nests and SEL noise levels were under 25 dBW (69 dB, unweighted; Table C7). Due to the low probability of encountering missile fire, the team was unable to test for RCW response at distances less than 750 m.

Artillery/grenade simulators

The research team recorded eight passive simulator blasts during eight data sessions at two RCW groups in 1998 and 1999 (Table C8, Appendix C). Woodpeckers flushed once in response to a passive grenade simulator blast about 100 m from nests in 1999 during a realistic training maneuver (example of noise spec-

tral data: Figure C8, Appendix C). A bird returned to the nest within 8 minutes after the flush had occurred (this site successfully fledged one young). Overall, RCW did not flush when grenade simulators were detonated more than 200 m from nest sites and SEL noise levels were under 47 dBW (82 dB, unweighted; Table C8; example of noise spectral data: Figure D12, Appendix D). The team did not record any passive grenade simulator blasts more than 100 m from any active RCW nests, therefore they could not test for response within this range.

Fixed-wing aircraft

The reasearchers were able to record RCW response at the nest (cluster 51; 1998) for only one fixed-wing aircraft (i.e., C-130) event during the incubation phase. This noise event did not elicit a flush response. All other fixed-wing recordings occurred prior to nesting or during the nestling phase and therefore the data were not used in the analysis. An example of noise spectral data for fixed-wing aircraft are shown in Figure D13 (Appendix D). RCW did not flush when fixed-wing aircraft were more than 600 m from nests and SEL noise levels were less than 62 dBW (90 dB, unweighted; Table C10). Due to the low probability of encountering fixed-wing aircraft during the incubation and early brooding phases, the team was unable to test for RCW response at distances over 600 m.

Noise Measurement Testing

Cavity versus base noise comparison

In addition to recording experimental noise events at the base of active RCW nest trees during the breeding season, the research team also measured and compared base and nest cavity noise measurements for these same cavity trees during the post-breeding season. They found that unweighted noise levels inside RCW cavities were significantly louder than levels recorded at the base of nest trees, regardless of stimulus type, year, or stimulus distance from the nest tree (One-way ANOVA, Dunnett's T3: P < 0.05; Tables C11 and C12, Appendix C). As an example, an artillery simulator blast recorded in 2000 registered 102.8 dB (unweighted) inside a RCW nest cavity at 61.0 m, while the same blast registered only 87.9 dB (unweighted) at the base of the same cavity tree. The same pattern held for .50-caliber blank fire tests, where a blank fire event recorded in 2000 registered 106.0 dB (unweighted) inside the nest cavity compared with 91.0 dB (unweighted) at the base of the same tree (One-way ANOVA, Dunnett's T3: P < 0.05; Tables C11 and C12).

Researchers also observed differences in how noise energy was distributed along the frequency spectrum for cavity versus base measurements. Nest cavities

acted as sound resonators, emphasizing the 125- to 250-Hz frequencies, and varied by individual tree (Delaney et al. 2001). Maximum spectral noise levels (dB, unweighted) from .50-caliber blank fire events and artillery simulators were 17.5 and 24.4 dB (unweighted) greater, respectively, inside cavities compared with recordings for the same events measured at the base of the tree (Delaney et al. 2001, Figures C1 and C2, Appendix C). Mean differences in unweighted noise levels between RCW nest cavities and base measurements increased with increasing distance from nest trees regardless of stimulus type or year (Tables C11 and C12). Mean differences for artillery simulator blasts between cavity and base measurements in 2000 varied by 9.0 dB (unweighted) at 15.2 m from RCW cavities, to 14.9 dB (unweighted) at 61.0 m, and to 20.7 dB (unweighted) at 121.9 m distance (Tables C11 and C12). Mean differences in .50-caliber blank fire blasts registered similar differences between cavity and base measurements ac-cording to distance regardless of year. Mean differences in .50-caliber blank fire blasts between cavity and base measurements in 2000 varied by 9.6 dB (unweighted) at 15.2 m from RCW cavities, to 15.0 dB (unweighted) at 61.0 m, and to 18.0 dB (unweighted) at 121.9 m distance (Tables C11 and C12). This pattern was not evident using woodpecker weighting. Researchers found no significant difference between cavity and base noise measurements, regardless of stimulus type or distance, nor did they find that differences between cavity and base measurements varied with distance (Tables C11 and C12) when using woodpecker weighting.

Frequency weighting comparison

Unweighted noise levels were significantly louder than woodpecker weighted noise levels, regardless of stimulus type, year, or microphone position (One-way ANOVA, Dunnett's T3: P < 0.05; Tables C11 and C12, Appendix C). Woodpecker weighted noise levels in cavities were not significantly louder than woodpecker weighted noise at the base of nest trees, regardless of stimulus type, year or distance (Tables C-11 and C12).

Stimulus type comparison

Artillery simulator and .50-caliber blank fire events generated comparable noise levels during the 1999 field season, regardless of microphone position (i.e., cavity or base of tree; Tables C11-C12, Appendix C). In 1999, RCW flushed from their nests at significantly higher rates during .50-caliber blank fire tests than during artillery simulator tests at comparable distances (Fisher Exact Test, P = 0.03; Tables C11-C12). In 2000, researchers observed that .50-caliber blank fire events were significantly louder than artillery simulators at comparable distances and microphone locations (One-way ANOVA, Dunnett's T3: P < 0.05;

Tables C11-C12). Higher noise levels during .50-caliber blank firing testing did not translate into greater flush response levels for RCW in 2000. In 2000, RCW flushed at similar rates during .50-caliber blank fire tests compared with artillery simulator tests over comparable distances (Fisher Exact Test, P = 0.15; Tables C11-C12).

Yearly noise comparison

Noise levels from artillery simulator blasts varied by year. On average, artillery simulator blasts in 1999 were significantly louder than blasts in 2000, regardless of stimulus distance (One-way ANOVA, Dunnett's T3: P < 0.05; Tables C11 and C12, Appendix C). Researchers also observed a significant difference in RCW response to artillery simulators between years, with a greater proportion of RCW flushing in 2000 than in 1999 at comparable distances (Fisher Exact Test; P = 0.01). Researchers did not observe a yearly variation in noise level (One-way ANOVA, Dunnett's T3: P > 0.05) or RCW flush response during .50-caliber blank fire tests between 1999 and 2000 (Fisher Exact Test; P = 0.13).

Natural versus artificial cavity comparison

The research team experimentally tested the difference in noise level between cavity and base measurements for natural and artificial cavities in 1999 and 2000 using .50-caliber blank fire and artillery simulators. They found that on average there was a 4.43 ± 0.41 dBW difference between artillery simulator blasts recording in natural nest cavities and levels recorded at the base of natural nest trees. This compared with a 3.41 ± 0.36 dBW difference between artificial nest cavities and their bases. Natural and artificial base/cavity comparisons did not differ significantly using a paired t-test ($F_{1,59} = 1.89$, P = 0.06). The team found similar results when they compared natural and artificial cavities with base measurements during .50-caliber blank fire testing. On average, natural cavities were 4.29 ± 0.21 dBW higher than base measurements, while artificial cavities were 4.32 ± 0.48 dBW greater. These differences did not vary significantly ($F_{1,162} = 0.064$, P = 0.95).

Observation of Nest Depredation Events

The research team documented one cavity kleptoparasitism (termed by Kappes and Harris 1997) event by a Red-bellied Woodpecker (*Melanerpes carolinus*) and one nest depredation event by a Rat Snake (*Elaphe obsoleta*) during 3 years of intensive video work on RCW on Fort Stewart (Figures E1 and E2, Appendix E). A rat snake was videotaped entering an active RCW nest with two eggs and two

nestlings present. The rat snake left the nest the following day after spending over 32 hours in the cavity. The team also videotaped a Red-bellied Woodpecker eject an adult and a juvenile RCW in the process of usurping the nest. The adult and juvenile RCW appeared to be unharmed by this event. The juvenile was approximately 25 days old when it was ejected from the nest and was found 2 days later during a fledge check for the cluster. This RCW group did not use the same nest tree the following year, though they did use another cavity tree and was successful in fledging young.

Four other RCW groups may have failed due to nest depredation (two rat snake events and two southern flying squirrel events [Glaucomys volans]), but reserahers could not confirm that these sites were still active just prior to occupation by predators. In 1999, Fish and Wildlife personnel on Fort Stewart removed a rat snake from an RCW nest that had produced a second clutch. The snake later passed identification bands for the young of that RCW group confirming that it had consumed the nestlings (Larry Carlile, Wildlife Biologist, August 1999, Professional Communication). Researchers also documented two nest depredation attempts using video; one by a Red-shouldered Hawk (Buteo lineatus; Figure E3) and the other by an American Crow (Corvus brachyrhynchos; Figure E4).

5 Discussion

Nesting Success

Based on the level (i.e., noise levels, stimulus distances, and frequency of noise events) and type of noise sources tested, experimental and passive military training noise events did not significantly affect Red-cockaded Woodpecker nesting success or productivity. Researchers believe the small but non-significant decrease in reproductive success and productivity between disturbed and undisturbed RCW groups was attributable to natural attrition inherent in the larger disturbed sample. Overall, reproductive success rates for disturbed and control sample groups were comparable with population level success rates on Fort Stewart. Other researchers have reported similar findings when comparing RCW fitness parameters between passive disturbed RCW groups and undisturbed groups (Fort Stewart ESMPT 2001; Doresky et al. 2001).

Based on the observed 6 to 13 percent variation of reproductive success rates (disturbed, undisturbed, and overall population levels) from 1998 to 2000, the research team believes that fitness rate differences of 20 percent between disturbed and undisturbed groups are biologically meaningful for RCW and should be used when conducting power analyses. Such a rate level has been suggested by other researchers as biologically meaningful (Steidl et al. 1997). The ability to detect differences in RCW fitness parameters on Fort Stewart was limited by population size (i.e., control group availability). Samples sizes of 95 experimental and 95 control RCW groups were required to reach an adequate power level of 0.80. Therefore, researchers attempted to study as many experimental and control RCW groups as possible in 1999 and 2000. Since only 165 and 170 RCW groups nested in 1999 and 2000, adequate sample power could not be reached during any year of this study. Control sites were selected from the Fort Stewart RCW population due to limited numbers of active RCW groups on private and state lands in the Coastal Plain and Piedmont province in Georgia (Baker 1995). Active RCW groups have steadily declined on much of the private land in Georgia due to limitations in cavity tree availability, habitat fragmentation, poor foraging habitat, and ineffective burning regimes (Baker 1995). No RCW groups are currently known to reside within 3 miles of Fort Stewart (Fort Stewart ESMPT 2001).

Flush Response and Related Behaviors

Flush response

The proportion of RCW that flushed in response to experimental training noise was negatively related to stimulus distance and positively related to noise level. Similar patterns have been reported for other bird genera (Grubb and King 1991; McGarigal et al 1991; Delaney et al. 1999), but not previously for any woodpecker species. The only exception to this trend occurred during .50-caliber blank fire testing in 2000 at the 76.2 m distance. Researchers observed that RCW flushed in all three tests at this distance. It is possible that the flush rate at the 76.2 m distance was inflated due to small sample size, and that an increase in the number of trials would have decreased overall flush rates at this distance.

Trend data indicate that RCW may flush more frequently in response to .50caliber blank fire events than artillery simulators at comparable distances. The visibility of the noise source, frequency of occurrence, and the duration of the noise stimuli may explain this trend. There were inherit differences in how .50caliber and artillery simulators were presented to RCWs. Artillery simulator blasts lasted only 10 to 15 seconds and required just 1 person to detonate the simulator, while blank fire events required 2 people to set up and lasted between 1 and 5 minutes. This may explain why the dose-response threshold curve for .50-caliber blank fire events increased more rapidly than artillery simulators over similar distances. It is possible that a disturbance in close proximity to an RCW's location may be more visible to RCW from the mouth of the nest cavity and therefore elicit a greater response than a disturbance further away, regardless of noise level. It is important to consider all aspects, including visual impacts of a stimuli, when examining an animal's response to a disturbance. Although season and nesting phase influence avian response to disturbance (Thiessen 1957; Knight and Temple 1986; Delaney et al. 1999), habituation, prior experience, and animal temperament are important factors that should be taken into account (Hart 1985; Manci et al. 1988).

Red-cockaded Woodpeckers flushed infrequently in response to passive military training noise during the 1998 through 2000 nesting seasons. Most of the passive noise events recorded were relatively distant compared with experimental testing and had moderate to low noise levels. Woodpeckers returned to their nests relatively quickly after being flushed. Researchers did not find a relationship between return time and stimulus distance. Return times by RCW were comparable with times reported for bird species in other noise disturbance stud-

ies (Awbrey and Bowles 1990; Holthuijzen et al. 1990), and were comparable between years during this study (Delaney et al. 2000, 2001).

Natural disturbance effects

The amount of time that an attending adult is away from the nest has important consequences when considering the role that nest depredation and nest kleptoparasitism has on this species. Rat snakes frequently prey on cavity nesting birds (Jackson 1970), and have been documented to prey on RCW eggs and nestlings (Jackson 1978b; Neal et al. 1993; Pater et al. 1999). A number of species are capable of usurping nesting cavities from RCW. Both Red-bellied Woodpeckers (Kappes and Harris 1997), and Red-headed Woodpeckers (Jackson 1994) have been shown to remove and eat eggs, usually in the process of usurping the cavity from the RCW. Southern flying squirrels (Glaucomys volans) have also been documented to eat RCW eggs while usurping RCW nest cavities (Harlow and Doyle 1990), though there is disagreement over whether cavity kleptoparasitism by flying squirrels significantly reduces reproduction of RCW (U.S. Fish and Wildlife Service 2000). Some researchers suggest that cavity kleptoparasitism by flying squirrels reduces nesting attempts by RCW (Loeb and Hooper 1997), while others researchers have reported no impact by flying squirrels on RCW nesting attempts (Mitchell et al. 1999). It does not appear that nest depredation or cavity kleptoparasitism has a significant impact on RCW nesting success on Fort Stewart based on the low number of documented cases on the installation from 1998 through 2000.

Nesting behaviors

The research team is currently analyzing RCW nesting behavior (collected by video data and direct observation) to determine if nest attentiveness, trip frequency, timing, duration, or the number of prey deliveries are influenced by experimental or passive training activities on Fort Stewart compared with undisturbed groups. This information will be presented in a separate report. The team recorded over 10,000 hours of video on RCW nest behavior at 35 RCW groups from 1998 through 2000. Eleven of these video sites received experimental testing during this study, while 13 received passive disturbance events. An additional 11 were considered control groups and will be used to develop baseline behavioral trends to which passive and experimental groups will be compared. Researchers did not observe any nest abandonment relative to camera use. Birds were observed using camera trees for foraging and perch sites when coming and going from the nest tree.

Distance and Sound Thresholds

Due to the variation in noise level and frequency spectra for other noise sources on Fort Stewart, passive noise event distances and sound thresholds were addressed on a case-by-case basis. Due to the varied nature and location of maneuver training activities on Fort Stewart, it is highly unlikely that most woodpeckers would receive as much disturbance activity during the nesting season as the experimentally disturbed RCW groups received during any single year for this study. Findings in Hayden et al. (2002) support this assertion; the authors reported that few RCW groups receive high levels of military maneuver training activities on Fort Stewart. Despite the aggressive nature of the current testing regime (i.e., close proximity and repeated exposure), RCW behavioral responses were minimal when experimental stimuli were greater than 121.9 m away and did not flush from the nest when noise sources were greater than 152.4 m away. Even when more aggressive noise tests were performed (equal to or less than 91.4 m from RCW position), RCW returned to their nests relatively quickly after being flushed, they did not abandon their nests, and they did not suffer a reduction in fitness rates compared with undisturbed RCW groups.

An examination of the data (Appendix C) reveals a wide range of received noise levels at a given distance. One reason is that different types of noise sources have different acoustic source energy. Another reason is that certain noise sources can vary in the number of noise events that occur within a specific period of time (i.e., 1 round from a .50-caliber machine gun versus a 10-round burst). Variation in the frequency and timing of a noise source can greatly change its total emissive power. Noise sources can also vary depending on how they were manufactured (e.g., amount of explosive power in an artillery simulator). Researchers observed a difference in the emissive power of artillery simulators (at similar distances) during experimental testing between 1999 and 2000, though this did not translate into any detectable variation in RCW flush response between years.

For a given noise source, the received noise level also depends on differences in propagation conditions, a result of differences in atmospheric wind and temperature structure. It is well known that at distances of several kilometers, received noise level can vary by as much as 50 dB above and below the mean due to changes in meteorological conditions (Embleton 1982; Li et al. 1994; Larsson and Israelsson 1991; Pater 1981; Piercy et al. 1977; White and Gilbert 1989; White et al. 1993). Differences in received noise level can also be due to orientation of the weapon relative to the receiver. Many weapons exhibit substantial directivity; some as much as 15 dB louder downrange (Pater 1981; Pater et al. (Draft); Schomer et al. 1976a and 1976b [Vol I and II]; Schomer et al. 1979; Schomer et

al. 1981; Schomer 1982; Schomer 1984; Schomer and Goebel 1985; Schomer 1986a, 1986b; Walther 1972). Some other important factors that should be taken into account are the orientation of the nest cavity relative to the noise source and any barriers between the noise source and the bird's position.

Noise Measurement Test

Unweighted noise levels in RCW nest cavities were substantially louder than noise levels recorded at the base of the nest tree due to a possible Helmholtz resonating effect. Due to differences in cavity and weapon orientation, presence or absence of barriers, and weapon directivity, researchers were not always able to extrapolate noise levels recorded at the base of the tree to received levels within RCW nest cavities. Noise measurements were therefore taken inside nest cavities after the nesting season for each noise source to determine the noise levels that birds may actually be experiencing. Based on woodpecker-weighted algorithms, it does not appear that RCW perceive noise levels inside cavities any louder than noise levels outside the cavity. Our data indicate that cavity resonance does not influence RCW perception of its surrounding noise environment. Researchers also did not find a significant difference in noise levels between natural and artificial nest cavities. This is an important finding when we consider how valuable artificial cavities are to the management and recovery of RCWs (USFWS 2000).

Management Implications

This research differs from previous noise disturbance studies in a number of important ways. First, the research team interpreted noise levels based on woodpecker weighting algorithms, which is more specific to the subject animal's hearing sensitivity than the generalized and less applicable A- or Unweighted algorithms. This provided a much more accurate picture of how RCW perceive their environment. Secondly, controlled experimentation, with actual military noise sources, allowed the team to develop realistic dose-response thresholds for this species. Such thresholds should provide resource managers with the tools necessary to determine the potential impacts of future disturbance activities and provide information on what proportion of the population may be impacted.

The data indicate that infrequent, short duration (less than 2 hours) military training exercises that are in close proximity to active RCW nest sites will not significantly impact RCW fitness rates on military installations. It is important to note that this assertion is based on a few caveats, namely that the team did

not test military training activities within RCW groups that lasted longer than 2 hours, habitat quality was not a limiting factor in the RCW groups that were tested, and the results are applicable only to the level of noise testing (i.e., noise level, number and frequency of noise events, and disturbance distance) conducted during this study. The research team does not believe that military maneuver training noise is a limiting factor in the recovery of Red-cockaded Woodpeckers on military installations. This is evident in the fact that the numbers of active, nesting, and successful RCW nests on Fort Stewart increased each year during this study (Fort Stewart ESMPT 2001), and that researchers did not see a difference in RCW fitness rates in the year following the conclusion of the experimental testing.

The research team suggests that land management practices play a more important role in the overall success and continued existence of RCW on military lands than military maneuver training activities or noise. Fort Stewart, as other DoD installations, has made significant strides in improving RCW habitat quality on their lands (e.g., Fort Stewart ESMPT 2001). Land management practices (i.e., frequent prescribed burning rotations, hardwood control, commercial thinning, reestablishment of native ground cover, and conservation, and regeneration of longleaf pine) and population management techniques (i.e., provisioning of RCW clusters with artificial cavities and drilled starts) have been vital in improving habitat quality for Red-cockaded Woodpeckers on military lands (Fort Stewart ESMPT 2001). Such land management practices do not preclude the possibility that a small portion of RCW groups may be impacted by maneuver training activities and noise on military installations. We suggest that RCW adaptation to natural disturbance (i.e., fire and various depredation pressures), through cooperative breeding and renesting (USFWS 2000), provide RCWs with the necessary tools to deal with other disturbance factors. The team also suggests that habitat quality (i.e., foraging habitat and adequate number of nest cavities) plays an important role in an RCW's ability to cope with extraneous disturbance factors during the breeding season.

6 Plans and Conclusions

Plans

Red-cockaded Woodpecker nesting data from 1998 to 2000 (i.e., nest attentiveness, prey delivery rates, trip frequency and duration) are currently being analyzed and will be presented in a separate report that is planned for submission to SERDP by December 2002. In this report we will detail baseline RCW nesting behaviors and compare various nesting behaviors between disturbed and undisturbed RCW nest sites.

Conclusions

During this study the research team observed and documented experimental training noise events and the resulting RCW responses under realistic conditions. Both proximate response behavior and nesting success were measured. The team also observed RCW behavior and nesting success for groups where noise stimuli were absent or minimal (near or below ambient sound levels), to provide an undisturbed behavior baseline to judge response and impact against. No significant differences in nesting success or productivity were found between experimentally disturbed and relatively undisturbed RCW groups.

References

- 35 Federal Register 16047-16048, "Appendix D United States List of Endangered Native Fish and Wildlife."
- AERTA. 1999. "U.S. Army Environmental Requirement and Technology Assessments." Http://denix.cecer.army.mil/denix/DOD/Policy/Army/Aerta/default. html.
- Anderson, D.E., O.J. Rongstad, and W.R. Mytton. 1989. "Response of nesting red-tailed hawks to helicopter flights." *Condor* 91:296-299.
- American National Standards Institute (ANSI). 1969. "Audiometer Standard 3.6."
- ANSI, S1.4-1983. "American National Standard Specification for Sound Level Meters." 1983.
- ANSI, S12.4-1986. "American National Standard Method for Assessment of High-Energy Impulsive Sounds with Respect to Residential Communities."
- ANSI, S12.40-1990. "Sound Level Descriptors for Determi-nation of Compatible Land Use."
- ANSI, S1.1-1994. "American National Standard: Acoustical Terminology."
- ANSI, S12.9-1996. Quantities and Procedures for Description and Measurement of Environmental Sound Part 4: Noise Assessment and Prediction of Long-term Community Response.
- ANSI, S12.17-1996. Impulse Sound Propagation for Environmental Noise Assessment.
- Awbrey, F.T., and A.E. Bowles. 1990. The effects of aircraft noise and sonic booms on raptors: a preliminary model and a synthesis of the literature on disturbance. Noise and Sonic Boom Impact Technology, Technical Operating Report 12. Wright-Patterson Air Force Base (AFB), OH.
- Baker, W.W. 1995. "The distribution and status of the Red-cockaded Woodpecker in Georgia, 1992." Pages 465-469 in D.L. Kulhavy, R.G. Hooper, and R. Costa, eds., *Red cockaded Woodpecker: recovery, ecology, and management.* Center for Applied Studies in Forestry, College of Forestry, Stephen F. Austin State University, Nacogdoches, TX.
- Beaty, T.A. 1986. Response of Red-cockaded Woodpeckers to habitat alteration. Directorate of Engineering and Housing, Fish and Wildlife Section, Fort Stewart, GA.
- Borenstein, M., H. Rothstein, and J. Cohen. 1997. SamplePower 1.0. SPSS, Chicago, IL.

Bowles, A.E. 1995. "Responses of wildlife to noise." Pages 109-156 in R.L. Knight and K.J. Gutzwiller, eds, *Wildlife Recreationists*. Island Press, Washington, DC.

- Bowles, A.E., F.T. Awbrey, and R. Kull. 1990. "A model for the effects of aircraft over-flight noise on the reproductive success of raptorial birds." Noise and Sonic Boom Impact Technology, Inter-Noise 90. Wright-Patterson AFB, OH.
- Brown, B.T., G.S. Mills, C. Powels, W.A. Russell, G.D. Therres, and J.J. Pottie. 1999. "The influence of weapons-testing noise on Bald Eagle behavior." *J. Raptor Res.* 33(3):227-232.
- Buchta, E. 1990. "A field survey of annoyance caused by sounds from small firearms." *J. Acoust. Soc. Am.*, 88, 1459-1467.
- Carrier, W.D., and W.E. Melquist. 1976. "The use of a rotor-winged aircraft in conducting nesting surveys of ospreys in northern Idaho." *J. Raptor Res.* 10:77-83.
- Charbonneau, D., L. Swindell, E.J. Moore, T.A. Beaty, and A. Eaton. 1983. *Preliminary report of the effects of forage habitat reduction on Red-cockaded Woodpecker reproduction in the CALFAX Range Facility at Ft. Stewart, Georgia*. Directorate of Engineering and Housing, Fish and Wildlife Section, Fort Stewart, GA.
- Conner, R.N., D.C. Rudolph, D.L. Kulhavy, and A.E. Snow. 1991. "Causes of mortality of Red-cockaded Woodpecker cavity trees." *J. Wildl. Manage*. 55:531-537.
- Connor, R., D.C. Rudolph, D. Saenz, and R.R. Schaefer. 1994. "Heartwood, sapwood, and fungal decay associated with Red-cockaded Woodpecker cavity trees." *J. Wildl. Manage*. 58:728-734.
- Connor, R. and D.C. Rudolph. 1995. "Excavation dynamics and use patterns of Red-cockaded Woodpecker cavities: relationships with cooperative breeding." Pages 343-352 in D.L. Kulhavy, R.G. Hooper, and R. Costa, eds, *Red cockaded Woodpecker: recovery, ecology, and management.* Center for Applied Studies in Forestry, College of Forestry, Stephen F. Austin State University, Nacogdoches, TX.
- Costa, R. and R. Escano. 1989. *Red-cockaded Woodpecker: status and management in the south*ern region in 1986. U.S. Forest Service Technical Publication R8-TP12.
- Costa, R. 1992. "Challenges for recovery." Pages 37-44 in *Proceedings from Sandhills Red-cockaded Woodpecker conference*. D.J. Case and Assoc., Mishawaka, IN.
- Craig, T.H., and E.H. Craig. 1984. "Results of a helicopter survey of cliff nesting raptors in a deep canyon in southern Idaho." *J. Raptor Res.* 18:20-25.
- Cunningham, J.W. 1946. "Missouri Region." Audobon 48:124-125.
- Delaney, D.K., T.G. Grubb, and D.K. Garcelon. 1998. "An infrared video camera system for monitoring diurnal and nocturnal raptors." *J. Raptor. Res.* 33:290-296
- Delaney, D.K., T.G. Grubb, P. Beier, L.L. Pater, and M.H. Reiser. 1999. "Effects of helicopter noise on Mexican Spotted Owls." *J. Wildl. Manage*. 63:60-76.

Delaney, David K., Larry L. Pater, Timothy J. Hayden, Linton Swindell, Tim Beaty, Larry Carlile, and Eric Spadgenske. 2000. Assessment of training noise impacts on the Red-cockaded Wood-pecker: 1999 Results. ERDC/CERL Technical Report (TR) 00-13, ADA379281.

- Delaney, David K., Larry L. Pater, Linton L. Swindell, Tim A. Beaty, Larry D. Carlile, and Eric W. Spadgenske. 2001. Assessment of training noise impacts on the Red-cockaded Woodpecker: 2000 Results. ERDC/CERL Technical Report (TR) 01-52,/ADA392799.
- Devlin, W.J., J.A. Mosher, and G.J. Taylor. 1980. "History and present status of the Red-cockaded Woodpecker in Maryland." *Am. Birds* 34:314-316.
- Dooling, R. J., Lohr, B., and Dent, M. L. 2000. "Hearing in birds and reptiles." Pages 308-359 in *Comparative Hearing: Birds and Reptiles*, R. J. Dooling, R. R. Fay, A. N. Popper, eds., New York, Springer-Verlag.
- Doresky, J., K. Morgan, L. Ragsdale, and J. Townsend. 2001. "Effects of military activity on reproductive success of Red-cockaded Woodpeckers." *J. Field Ornithol.* 72(2):305-311.
- Edwards, R.G., A.B. Broderson, R.W. Barbour, D.F. McCoy, and C.W. Johnson. 1979. Assessment of the environmental compatibility of differing helicopter noise certification standards. Final Report for the Department of Transportation, Seattle, WA. Report #FAA-AEE-19-13. Contract #78419000000000.
- Ellis, D.H. 1981. Responses of raptorial birds to low level military jets and sonic booms: Results of the 1980-81 Joint U.S. Air Force-U.S. Fish and Wildlife Service Study. Institute for Raptor Studies Report NTIS ADA108-778.
- Ellis, D.H., C.H. Ellis, and D.P. Mindell. 1991. "Raptor responses to low-level jet aircraft and sonic booms." *Environmental Pollution* 74:53-83.
- Embleton, T. 1982. "Sound Propagation Outdoors Improved Prediction Schemes for the 80's." *Noise Control Engineering Journal* 18(1):30-39.
- Environmental Protection Agency (EPA). 1974. Information on Levels of Environmental Noise Requisite to Protect Health and Welfare with an Adequate Margin of Safety, U.S. Environ-mental Protection Agency, Report No. 550/9-74-004, March 1974.
- Environmental Protection Agency (EPA). 1982. Guidelines for Noise Impact Analysis, U.S. Environmental Protection Agency, Report No. 550/9-891-105.
- FICUN. 1980. Federal Interagency Committee on Urban Noise, Guidelines for Considering Noise in Land Use Planning and Control.
- Fidell, S., D.S. Barber, and T.J. Schultz. 1991. "Updating of a dosage-effect relationship for the prevalence of annoyance due to general transportation noise." *J. Acoust. Soc. Am.*, 89:221-233.
- Fort Stewart Endangered Species Management Planning Team. 2001. *Multi-Species Endangered Species Management Plan*. 124 pages + appendices.

Fraser, J.D., L.D. Frenzel, and J.E. Mathisen. 1985. "The impact of human activities on breeding bald eagles in north-central Minnesota." *J. Wildl. Manage*. 49:585-592.

- Frost, C.C. 1993. "Four centuries of changing landscape patterns in the longleaf pine ecosystem." Pages 17-44 in S.M. Hermann, ed., The longleaf pine ecosystem: ecology, restoration, and management. Tall Timbers Fire Ecology Conference Proceedings, No. 18. Tall Timbers Research Station, Tallahassee, FL.
- Fyfe, R.W., and R.R. Olendorff. 1976. *Minimizing the dangers of studies to raptors and other sensitive species*. Canadian Wildlife Service Occasional Paper 23.
- Grubb, T.G. and R.M. King. 1991. "Assessing human disturbance of breeding bald eagles with classification tree models." *J. of Wildl. Manage.* 55:501-512.
- Grubb, T.G., and W.W. Bowerman. 1997. "Variations in breeding bald eagle response to jets, light planes, and helicopters." *J. Raptor Res.* 31:213-222.
- Hanula, J.L. and K.E. Franzreb. 1995. "Arthropod prey of nestling Red-cockaded Woodpeckers in the upper coastal plain of South Carolina." *Wilson Bulletin* 107:485-495.
- Hanula, J.L., D. Lipscomb, K.E. Franzreb, and S.C. Loeb. 2000. "Diet of nestling Red-cockaded Woodpeckers at three locations." *J. Field Ornith.* 71:126-134.
- Harlow, R.F. and A.T. Doyle. 1990. "Food habits of southern flying squirrels (*Glaucomys volans*) collected from Red-cockaded woodpecker (*Picoides borealis*) colonies in South Carolina." *American Midland Naturalist* 124:187-191.
- Hart, B.L. 1985. The behavior of domestic animals. W.H. Freeman, New York, New York, USA.
- Hayden, T.J. 1997. Biological assessment of the effects of the proposed revision of the 1994 management guidelines for the Red-cockaded Woodpecker on Army installations. Special Report (SR) 97-48, ADA322086 (U.S. Army Construction Engineering Research Laboratory [CERL].
- Hayden, T.J., R.H. Melton, B. Willis, L.B. Martin III, and T. Beaty. 2002. Assessment of Effects of Maneuver Training Activities on Red-cockaded Woodpecker Populations on Fort Stewart, GA. ERDC/CERL TR-02-17.
- Hede and Bullen. 1982. "Community reaction to noise from a suburban rifle range." *Journal of Sound and Vibration*, 82, 39-49.
- Hess, C.A. and F.C. James. 1998. "Diet of the Red-cockaded Woodpecker in the Apalachicola National Forest." *J. Wildl. Manage*. 62:509-517.
- Hoffman, R., A. Rosenheck, and U. Guggenbuehl. 1985. Assessment Procedure for Rifle Firing

 Noise from 300 Meter Facilities, EMPA Department for Acoustics and Noise Abatement,

 Swiss Federal Office for Environmental Protection, February 1985.
- Hohman, W.L. 1986. "Incubation rhythms of Ring-necked Ducks." Condor 88:290-296.

Holland, E.D. 1991. "The environment can ground training." *Naval Proceedings*, October 1991: 71-75.

- Holthuijzen, A.M.A., W.G. Eastland, A.R. Ansell, M.N. Kochert, R.D. Williams, and L.S. Young. 1990. "Effects of blasting on behavior and productivity of nesting prairie falcons." *Wildlife Society Bulletin* 18:270-281.
- Homans, B. 1974. User Manual for the Acquisition and Evaluation of Operational Blast Noise Data, CERL TR E-42/ADA782911.
- Hooper, R.G. and M.R. Lennartz. 1981. "Foraging behavior of the Red-cockaded Woodpecker in South Carolina." Auk 98:321-334.
- Jackson, J.A. 1970. "Predation of a black rat snake on yellow-shafted flicker nestlings." Wilson Bulletin 82:329-330.
- Jackson, J.A. 1971. "The evolution, taxonomy, distribution, past populations, and current status of the Red-cockaded Woodpecker." Pages 4-29 in R.L. Thompson, ed., *Ecology and management of the Red-cockaded Woodpecker*. U.S. Bureau of Sport Fishing and Wildlife and Tall Timbers Research Station, Tallahassee, FL.
- Jackson, J.A. 1978a. "Analysis of the distribution and population status of the Red-cockaded Woodpecker." Pages 101-111 in R.R. Odum and L. Landers, eds., *Proceedings of the rare* and endangered wildlife symposium. Georgia Dep. Nat. Res., Game Fish Div., Tech Bull., WL 4.
- Jackson, J.A. 1978b. "Predation by a gray rat snake on Red-cockaded Woodpecker nestlings." *Bird Banding* 49:187-188.
- Jackson, J.A. 1983. "Possible effects of excessive noise on post-fledging Red-cockaded Woodpeckers." Pages 38-40 in D.A. Wood, ed., *Red-cockaded Woodpecker symposium II proceedings*, Florida Game Fresh Water Fish Commission, Tallahassee, FL.
- Jackson, J.A. 1987. "The Red-cockaded Woodpecker." Pages 479-493 in R.L. DiSilvestro, ed., Audubon wildlife report 1987, Academic Press, New York.
- Jackson, J.A. 1994. "Red-cockaded woodpecker (*Picoides borealis*)." Pages 1-19 in A. Poole and F. Gill, eds., *The Birds of North America*, No. 85. The Academy of Natural Sciences, Washington, DC, The American Ornithologists Union.
- Jackson, J.A., and S.D. Parris. 1995. "The ecology of Red-cockaded Woodpeckers associated with construction and use of a multi-purpose range complex at Ft. Polk, Louisiana." Pages 277-282 in D.L. Kulhavy, R.G. Hooper, and R. Costa, eds.. Red cockaded Woodpecker: recovery, ecology, and management. Center for Applied Studies in Forestry, College of Forestry, Stephen F. Austin State University, Nacogdoches, TX.
- Jordan, R.A., K.S. Wheaton, and W.M. Weiher. 1995. Integrated endangered species management recommendations for Army Installations in the Southeastern United States: Assessment of the potential effects of Army-wide management guidelines for the Red-cockaded Woodpecker on associated endangered, threatened, and candidate species. Final Report, The Nature Conservancy Southeast Regional Office, North Carolina.

Jordan, R.A., K.S. Wheaton, W.M. Weiher, and T.J. Hayden. 1997. *Integrated endangered species management recommendations for Army Installations in the Southeastern United States*. CERL SR 97-94, ADA286931, June 1997.

- Kappes, J.J. Jr., and L.D. Harris. 1997. "Defining cavity-associated interactions between redcockaded woodpeckers and other cavity-dependant species: interspecific competition or cavity kleptoparasitism?" Auk 114:778-780.
- Knight, R.L., and S.A. Temple. 1986. "Why does intensity of avian nest defense increase during the nesting cycle?" *Auk* 103:318-327.
- Konishi, M. 1973. "How the owl tracks its prey." American Scientist 61:414-424.
- Landers, J.L., D.H. Van Lear, and W.D. Boyer. 1995. "The longleaf pine forests of the southeast: requiem or renaissance." *Journal of Forestry* 93(11):39-44.
- Larsson, C., and S. Israelsson. 1991. "Effects of Meteorological Conditions and Source Height on Sound Propagation near the Ground." *Applied Acoustics* 33:109-121.
- Lawrence, G.N. 1867. Catalogue of birds observed in New York, Long and Staten Islands and the adjacent parts of New Jersey. Annual Lyceum of the Natural History of New York 8:279-300.
- Lennartz, M.R., P.H. Geissler, R.F. Harlow, R.C. Long, K.M. Chitwood, and J.A. Jackson. 1983. "Status of the Red-cockaded Woodpecker on federal lands in the south." Pages 7-12 in D.A. Wood, ed., *Red-cockaded Woodpecker symposium II Proceedings*. Florida Game Fresh Water Fish Commission, Tallahassee, FL.
- Li, Y.L., M.J. White, and S.J. Franke. 1994. "New fast field programs for anisotropic sound propagation through a wind velocity profile." *J. Acoust. Soc. Am.* 95:718-726.
- Ligon, J.D. 1968. "Sexual differences in foraging behavior in two species of Dendrocopos woodpeckers." *Auk* 85:203-215.
- Ligon, J.D. 1970. "Behavior and breeding biology of the Red-cockaded Woodpecker." Auk 87:255-278.
- Loeb, S.C. and R.G. Hooper. 1997. "An experimental test of interspecific competition for Red-cockaded Woodpecker cavities." *J. Wildl. Manage*. 61:1268-1280.
- Luz, G. 1982. "An improved procedure for evaluating the annoyance of small arms ranges." *J. Acoust. Soc. Am.*, 72, Suppl. 1, S26.
- Manci, K.M., D.N. Gladwin, R. Villella, and M.G. Cavendish. 1988. *Effects of aircraft noise and sonic booms on domestic animals and wildlife: a literature synthesis*. U.S. Fish and Wildlife Service Technical Report NERC 88.
- Martin, W.H. and S.G. Boyce. 1993. "Introduction: the southeastern setting." Pages 1-46 in W.H. Martin, S.G. Boyce, and A.C. Echternacht, eds., *Biodiversity of the southeastern United States: lowland terrestrial communities.* John Wiley and Sons, Inc., New York, NY.

McGarigal, K., R.G. Anthony, and F.B. Isaacs. 1991. *Interactions of humans and bald eagles on the Columbia River estuary.* Wildlife Monograph 115:1-47.

- Mitchell, L.R., L.D. Carlile, and C.R. Chandler. 1999. "Effects of southern flying squirrels on nest success of Red-cockaded Woodpeckers." *J. Wildl. Manage*. 63:538-545.
- Mobley, J., J.H. Carter and A.L. Clarke. 1996. "Evaluation of the potential impacts of military training activity on Red-cockaded Woodpecker (*Picoides borealis*) on Fort Bragg, North Carolina." Unpublished Report to USACERL under Research Order #35. 20 pages.
- National Academy of Sciences. 1977. Committee on Hearing, Bioacoustics, and Biomechanics, Working Group 69 Report, *Guidelines for Preparing Environmental Impact Statements on Noise.*
- National Academy of Sciences. 1981. Committee on Hearing, Bioacoustics, and Biomechanics, Working Group 84 Report, Assessment of Community Response to High-Energy Impulsive Sounds.
- National Oceanic and Atmospheric Administration. http://www.noaa.gov/.
- Neal, J.C., W.C. Montague, and D.A. James. 1993. "Climbing by black rat snakes on cavity trees of red-cockaded woodpeckers." Wildlife Society Bulletin 21:160-165.
- Pater, L.L. 1981. Gun Blast Far Field Overpressure Contours, Naval Surface Weapons Center TR-79-442.
- Pater, L.L., W. Alvendia, R. Yousefi, and J. Wilcoski. Draft. Acoustic Spectral Emissions Data for Several Small Weapons. CERL Draft Technical Report.
- Pater, L.L., D.K. Delaney, and T.J. Hayden, B. Lohr, and R. Dooling. 1999. Assessment of training noise impacts on the Red-cockaded Woodpecker: Preliminary results. CERL Technical Report (TR) 99/51, ADA367234.
- Piercy, J.E., T. Embleton, and L. Sutherland. 1977. "Review of Noise Propagation in the Atmosphere." *J. Acoust. Soc. Am.* 61:1403-1418.
- Platt, J.B. 1977. "The breeding behavior of wild and captive gyrfalcons in relation to their environment and human disturbance." Ph.D. dissertation. Cornell University, Ithaca, NY.
- Ramsey, P. 1980. "Seasonal, sexual and geographical variation in the foraging ecology of Redcockaded Woodpeckers (*Picoides borealis*)." M.Sc. thesis, Mississippi State Univ., Mississippi State, MS.
- Rice, C. 1983. "CEC Joint Research on Annoyance due to Impulse Noise: Laboratory Studies.

 Noise as a Public Health Problem." *Proceedings of the Fourth International Congress,*Volume 2, G. Rossi, Editor, Cetnro Ricerche E Studi Amplifon, Milan, Italy, pp 1073-1084.
- Rice, C., I. Flindell, and J. John. 1986. "Annoyance due to Impulse Noise: Laboratory Studies, Final Report," CEC Third Programme, Phase 2, 1984-85. Contract Report 86/13, Institute of Sound and Vibration Research, University of Southampton.

Rudolph, D.C., H. Kyle, and R.N. Conner. 1990. "Competition for Red-cockaded Woodpecker roost and nest cavities: effects of tree age and entrance diameters." Wilson Bulletin 102:23-36.

- Schomer, P.D., R.J. Goff, and L.M. Little. 1976a. *The Statistics of Amplitude and Spectrum of Blasts Propagated in the Atmosphere Vol. I*, CERL Technical Report (TR) N-13, ADA033475.
- Schomer, P.D., R.J. Goff, and L.M. Little. 1976b. *The Statistics of Amplitude and Spectrum of Blasts Propagated in the Atmosphere Vol. II. Appendices C through E*, CERL Technical Report (TR) N-13, ADA033361.
- Schomer, P.D., L.M. Little, and A.B. Hunt. 1979. *Acoustic Directivity Patterns for Army Weapons*, CERL Technical Report (TR) N-60, ADA066223.
- Schomer, P.D., D. Effland, V. Pawlowska, and S. Roubik. 1981. Blast Noise Prediction Volume 1: Data Bases and Computational Procedures, CERL Technical Report (TR) N-98, ADA099440.
- Schomer, P.D. 1982. Acoustic Directivity Patterns for Army Weapons: Supplement 1, CERL Technical Report (TR) N-60, ADA121665.
- Schomer, P.D. 1984. Acoustic Directivity Patterns for Army Weapons: Supplement 2, CERL Technical Report (TR) N-60, ADA145643.
- Schomer, P.D., and S.S. Goebel. 1985. Acoustic Directivity Patterns for Army Weapons: Supplement 3: The Bradley Fighting Vehicle, CERL Technical Report (TR N-60, ADA155219.
- Schomer, P.D. 1986a. Acoustic Directivity Patterns for Army Weapons: Supplement 4: The Multiple Launch Rocket System, CERL Technical Report (TR) N-60, ADA166490.
- Schomer, P.D. 1986b. "High-energy Impulsive Noise Assessment," J. Acoust. Soc. Am., 79(1):182-186.
- Schomer, P. 1994. "New Descriptor for High-Energy Impulsive Sounds." *Noise Control Eng. J.* 42(5):179-191.
- Schomer, P.D., L. Wagner, L. Benson, E. Buchta, K.-W. Hirsch, and D. Krahe. 1994. "Human and community response to military sounds: Results from field-laboratory tests of small-arms, tracked-vehicle, and blast sounds." *Noise Control Eng. J.* 42:71-84.
- Schreiber, E.R., R.A. Shaw, and A. Hill. 1997a. *Threatened and Endangered Species on Army Installations: a MACOM report.* CERL Technical Report 98/18, ADA336410. 171 pages.
- Schreiber, E.R., R.A. Shaw, A. Hill, and M.A. Reed. 1997b. *Installation Summaries From 1996 Survey of Threatened and Endangered Species on Army Lands*. U.S. Army Construction Engineering Research Laboratory, Technical Report 98/19, ADA336407. 51 pages.
- Schultz, T.J. 1978. "Synthesis of Social Surveys on Noise Annoyance." *J. Acoust. Soc. Am.*, 64:377-405.

Shaw, R.A., E.R. Schreiber, A. Hill, and M.A. Reed. 1997. *Installation summaries from the 1997 Survey of Threatened and Endangered Species on Army lands*. CERL Technical Report (TR) 98/106, ADA352526. 59 pages.

- Snyder, N.F.R., H.W. Kale II, and P.W. Sykes, Jr. 1978. An evaluation of some potential impacts of the proposed Dade County training jetport on the endangered Everglade Kite. FWS, Patuxent Wildl. Res. Cent., MD.
- Sorenson and Magnusson. 1979. "Annoyance caused by noise from shooting range." *Journal of Sound and Vibration* 62:437-442.
- SPSS, Inc. 1998. SPSS 8.0 for Windows: base, professional statistics, and advanced statistics. SPSS, Inc., Chicago, IL.
- Stalmaster, M.V., and J.L. Kaiser. 1997. "Flushing responses of wintering bald eagles to military activity." *J. Wildl. Manage*. 61:1307-1313.
- Steenhof, K., and M.N. Kochert. 1982. "An evaluation of methods used to estimate raptor nesting success." *J. Wildl. Manage.* 46:885-893.
- Steidl, R.J., J.P. Hayes, and E. Schauber. 1997. "Statistical Power Analysis in Wildlife Research." J. Wildlife Manage. 61:270-229.
- Thiessen, G. 1957. "Acoustic irritation threshold of ring-billed gulls." *J. Acoust. Soc. Am.* 29:1307-1309.
- Trainer, J.E. 1946. "The auditory acuity of certain birds." Dissertation, Cornell University, Ithaca, New York, New York.
- U.S. Code of Federal Regulations. 1980. Title 14, Part 150. "Airport Noise Compatibility Planning."
- U.S. Fish and Wildlife Service. 2000. Technical/agency draft revised recovery plan for the Redcockaded Woodpecker (Picoides borealis). U.S. Fish and Wildlife Service, Atlanta, GA.
- Vos, J. 1995. "A review of research on the annoyance caused by impulse sounds produced by small firearms." *Proceedings of INTER-NOISE 95: Vol 2*, Noise Control Foundation: New York, 875-878.
- Wagner, R.O. 1999. "Evaluation of potential military training impacts on the Red-cockaded Woodpecker, Fort Polk, Louisiana." Submitted to the U.S. Army Engineer District, Fort Worth, TX. Contract No. DACA63-98-P-1402. Final Report. 37 pages.
- Walters, J.R., P.D. Doerr, and J.H. Carter, III. 1988. "The cooperative breeding system of the Redcockaded Woodpecker." *Ethology* 78:275-305.
- Walters, J.R., C.K. Copeyon, and J.H. Carter III. 1992. "Test of the ecological basis of cooperative breeding in Red-cockaded Woodpecker." *Auk* 109:90-97.

Walther, M.F. 1972. *Gun Blast from Naval Guns*, NWL Technical Report TR-2733, Naval Weapons Laboratory, August 1972.

- White, C.M., and T.L. Thurow. 1985. "Reproduction of ferruginous hawks exposed to controlled disturbance." *Condor* 87:14-22.
- White, M.J., and K.E. Gilbert. 1989. "Application of the parabolic equation to the outdoor propagation of sound." *Applied Acoustics* 27(3), 227-238.
- White, M.J., C.R. Shaffer, and R. Raspet. 1993. *Measurements of Blast Noise Propagation over Water at Aberdeen Proving Ground, MD*, CERL Technical Report (TR) EAC-93/02, ADA280383.
- Windsor, J. 1977. The response of Peregrine Falcons (Falco peregrinus) to aircraft and human disturbance. Mackenzie Valley Pipeline Investigations, Report for Environmental Social Programs. Canadian Wildl. Serv.
- Zar, J.H. 1984. Biostatistical Analysis. Prentice-Hall, Englewood Cliffs, New Jersey.

Appendix A: Project-related Legal Requirements

Section 7 of the Endangered Species Act requires Federal agencies to carry out programs for the conservation of threatened and endangered (listed) species. Agencies are also required, through consultation with the USFWS or the NMFS, to ensure their actions do not jeopardize the continued existence of listed species or result in the destruction or adverse modification of critical habitat. To facilitate compliance with this requirement, the ESA requires the preparation of a Biological Assessment (BA) for major actions (Endangered Species Management Plans, Integrated Natural Resource Management Plans, Installation's Ongoing Mission). The purpose of the BA is to help the agency determine the effect of the proposed action on listed species present within the action area. If the proposed action may affect a listed species, the agency must consult with the FWS or NMFS, as appropriate. The agency informally consults to determine if there are methods or modifications to the action that can help to avoid adverse effects to listed species. If modifications are developed, consultation is completed and the action may proceed. If adverse impacts are unavoidable, formal consultation is initiated. The USFWS or the NMFS will evaluate the status of the species, the environmental baseline, and the effects of the proposed action to determine if the project may jeopardize the continued existence of the species or adversely modify critical habitat. As a result of the formal consultation the USFWS or the NMFS will issue a Biological Opinion (BO). If the BO concludes the action will jeopardize the continued existence of the species or adversely modify critical habitat, the BO will provide reasonable and prudent alternatives for the proposed action that are nondiscretionary for the action agency. If the BO concludes the action will not jeopardize the continued existence of a listed species or adversely modify critical habitat, the FWS or NMFS may issue a Incidental Take Statement (ITS) that will provide reasonable and prudent measures with specific terms and conditions that will minimize take of the species (ESA take prohibitions are explained in the next paragraph). These measures and conditions are nondiscretionary. The ITS exempts the agency from violating the ESA for a taking of a listed species. The implementation of these nondiscretionary alternative, measures, and conditions may place constraints on the execution of the military mission.

Section 9 of the ESA prohibits take of endangered species, where "take" means to harass, harm, pursue, hunt, shoot, wound, kill, trap, capture, or collect, or attempt to engage in any such conduct. Within the definition of take, the term "harm" has been subject to significant judicial scrutiny. "Harm" is clearly an act that actually kills or injures wildlife, but it may also include actions that significantly impair essential behavioral patterns, including breeding, feeding, or sheltering.

The National Environmental Policy Act (NEPA) requires Federal agencies to assess the impact of planned activities on the environment and to make the assessment available to the general public. The decisionmaking procedures may be documented by either an Environmental Assessment (EA) or an Environmental Impact Statement (EIS). Noise and threatened and endangered species are often important issues in these documents, particularly as reviewers place a stronger emphasis on cumulative effects of activities.

Appendix B: Woodpecker Audiogram

Introduction

As a means of estimating the hearing ability of an endangered species, the Red-cockaded Woodpecker, the research team examined the hearing of a surrogate species, the Downy Woodpecker (*P. pubescens*). Downy Woodpeckers are one of the RCW's closest relatives and serve as an excellent model to test the effects of noise on hearing in Red-cockaded Woodpeckers. Together with data for Budgerigars (*Melopsittacus undulatus*), for which there is both behavioral and physiological auditory data, researchers are able to provide a preliminary audiogram for small woodpeckers. In addition, they have been comparing the structure of vocalizations in these species because the spectral characteristics of a species' communication signals are often related to hearing ability.

Methods

Measuring auditory brainstem response in small birds

To obtain Auditory Brainstem Response (ABR) recordings in small birds (see Figure B1 for an example of an ABR), birds are first anesthetized lightly using a mixture of ketamine and diazepam. Once sedated, a bird is secured to a foam pad and Grass pin electrodes are placed under the surface of the skin on the scalp. The active electrode is placed at the vertex of the skull and the reference electrode is placed in the skin just dorsal and posterior to the ear that will receive the auditory stimuli. A ground electrode is placed under the skin on the opposite side of the head from the reference electrode.

Researchers use 5 ms alternating phase tone bursts with 2 ms cosine-ramped rise/fall times delivered at a rate of 20 per second. Responses are collected for 20 ms following each tone burst. Birds are tested at the following frequencies: 300 Hz, 500 Hz, 1000 Hz, 1500 Hz, 2000 Hz, 2860 Hz, 4000 Hz, 5700 Hz, and 8000 Hz. Click stimuli are 0.1 ms onset/offset pulses (also alternating in phase) delivered in the same way at a rate of 5 per second. Sound generation and waveform averaging are controlled with Tucker-Davis Technologies hardware modules and

software running on a Pentium 133 microcomputer. Tones and clicks are calibrated before and after each recording session using a Larson-Davis 824, Type 1, sound level meter. Stimuli are recorded and examined using the sound level meter and the SIGNAL sound analysis software package.

Estimating thresholds

Thresholds are estimated using peak-to-peak waveform amplitude of the ABR, as it varies with stimulus intensity. Researchers follow a 1-mV criterion; they estimate the intercept at a level of + 1mV, which accounts for noise inherent in the ABR trace. The thresholds are, therefore, the intensity values for tones at each frequency of the peak-to-peak amplitude as it falls to a level of + 1 mV. Such thresholds for tone bursts differ by an absolute value from auditory thresholds determined behaviorally. For this reason, researchers adjusted the thresholds obtained using auditory evoked techniques to get an estimate of behavioral thresholds (true thresholds) in woodpeckers. To make this adjustment, they used values from budgerigars, the only species for which both physiological and behavioral data is available.

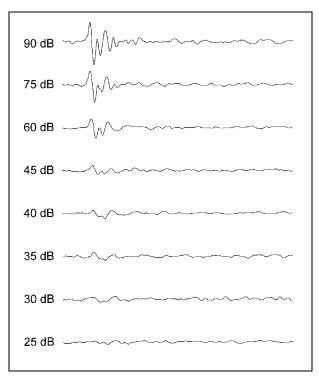


Figure B - 1. Example of an Auditory Brainstem Response (ABR).

Results

Audiograms

Results reported below indicate the best estimate of woodpecker hearing abilities based on data obtained from three individuals. Physiological audiograms for each of these three individuals are shown in Figure B2. An average Downy Woodpecker audiogram is shown in Figure B3, along with an average behavioral audiogram for 20 species of small passerine birds, and the average Downy Woodpecker audiogram adjusted for the absolute difference between physiological and behavioral curves in budgerigars (a 35 dB difference). Figure B2 illustrates the variability in data across individuals, suggesting that further tests with a larger sample are warranted. It appears that the shape of the woodpecker audiogram (Figure B3) is broadly comparable to that of small passerine birds but shows a greater sensitivity at relatively higher frequencies compared to the average passerine (frequency of best sensitivity is higher). Also, woodpeckers may be somewhat less sensitive in absolute terms than the typical passerine. Data for tones at 300 Hz are not displayed on these audiograms as woodpeckers exhibited no sensitivity at this lowest tested frequency (all peak-to-peak waveform amplitudes were less than 1 mV). Woodpeckers also showed little sensitivity to 8000 Hz tones using the ABR technique. Behavioral thresholds for budgerigars are typically at least 50 to 60 dB higher at this frequency than at their best frequency (approximately 2860 Hz), possibly accounting for the lack of response with the generally less sensitive ABR method of estimating hearing thresholds.

What might account for the higher threshold at best frequency for Downy Woodpeckers when compared with small passerines? One potential explanation derives from the technique of measuring evoked potentials at the surface of the skull. The skull is generally much thicker in woodpeckers than in budgerigars or small passerines. An increased skull thickness is likely to be a protective adaptation for drumming and other percussive behaviors in woodpeckers. It remains to be determined whether such adaptations also include a reduction in auditory sensitivity compared with other small birds, or whether skull thickness (or other active hearing protective mechanisms in the woodpecker ear) prevents measurement of true tone thresholds using the ABR technique. As researchers obtain more birds and continue testing, they can provide more confident assessments of the actual thresholds involved for small woodpeckers and their relationship to thresholds already determined for other species of small birds.

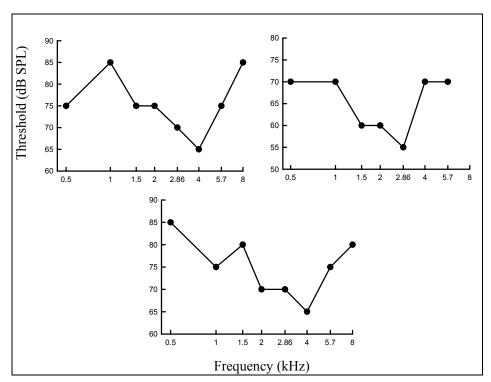


Figure B - 2. Audiograms for three individual Downy Woodpeckers obtained using ABR.

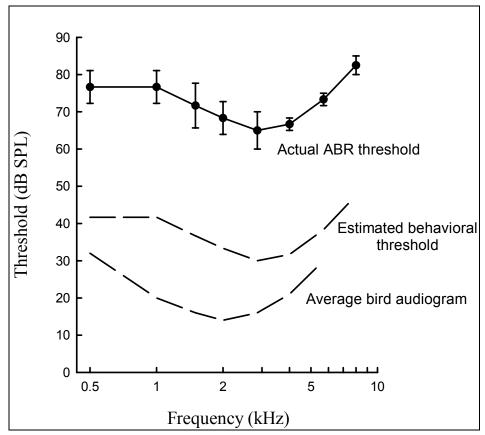


Figure B - 3. Average ABR audiogram for three Downy Woodpeckers (top), audiogram adjusted for absolute difference between physiological and behavioral thresholds (middle), and average passerine audiogram (estimated using behavioral techniques).

Vocalizations

Researchers obtained archived recordings of vocalizations of Downy Woodpeckers and RCW from the Cornell University Library of Natural Sounds and the Ohio State University Borror Laboratory of Bioacoustics. These recordings represent several different vocalization types of each species. Figure B4 shows average power spectra for three common vocal signals of the Downy Woodpecker, and for the percussive drumming of this species. Note the much lower frequencies present in the drum. Figure B5 shows the average power spectra for two vocalizations of the Red-cockaded Woodpecker. As these figures illustrate, most energy in the calls of these two woodpeckers spreads across a broad range of relatively high frequencies $(2-6~\mathrm{kHz})$ compared with the songs and calls of most passerines $(2-4~\mathrm{kHz})$.

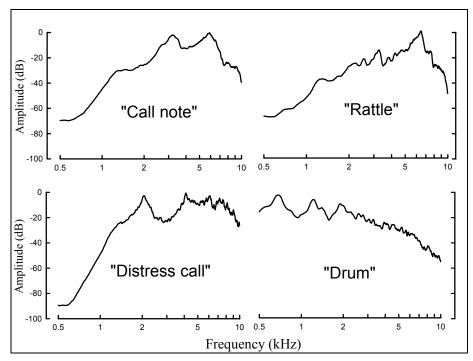


Figure B - 4. Average power spectra for three common Downy Woodpecker calls and the "drum" of this species.

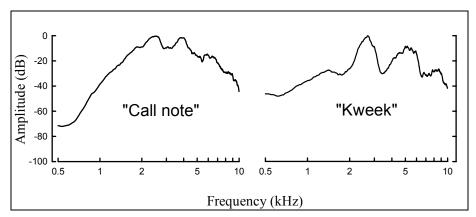


Figure B - 5. Average power spectra of two common vocalizations of the Red-cockaded Woodpecker.

Best sensitivity in the audiogram of most species, particularly passerines and other small birds such as budgerigars, typically coincides well with the peak of the average power spectrum of their vocal communication signals (Dooling et al. 2000). In Figure B5, the average spectra for the "drum" and "call note" of the Downy Woodpecker are superimposed over the average ABR audiogram from the three test individuals. While the "drum" has frequencies generally lower than the best sensitivity of the audiogram, the "call note" peak frequency corresponds reasonably well to the audiogram best sensitivity. Figure B6 shows the same audiogram with the "call note" of the Red-cockaded Woodpecker superimposed. Once again, there is a good correspondence between peak power in the average spectrum of this vocalization and best sensitivity of the audiogram. The general similarity in characteristics of the vocal spectra of Downy Woodpecker and RCW, in addition to their close relationship, further suggests that hearing abilities of the two species should be similar and that the Downy Woodpecker serves as a good model for hearing in the RCW.

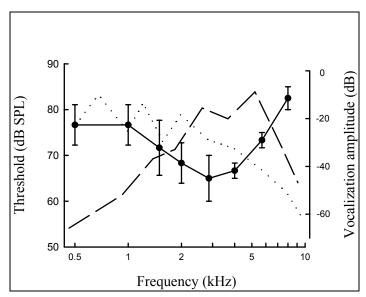


Figure B - 6. Average audiogram for three Downy Woodpeckers (solid line) with superimposed average power spectra for the percussive "drum" (dotted line), and the "call note" vocalization (dashed line) of Downy Woodpeckers.

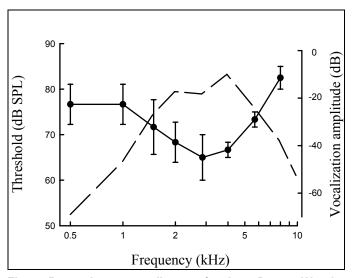


Figure B - 7. Average audiogram for three Downy Woodpeckers (solid line) with superimposed average power spectra for the "call note" of Red-cockaded Woodpeckers (dashed line).

Conclusions

- 1. Best sensitivity of the Downy Woodpecker ABR thresholds corresponds to the peak in the power spectrum of both Downy and Red-cockaded Woodpecker vocalizations, and best sensitivity is at a somewhat higher frequency than that for a typical passerine.
- 2. Woodpeckers may have a reduced auditory sensitivity relative to other species of small birds.

3. Given the similarity in spectral structure of the vocalizations of small woodpeckers, auditory sensitivity is probably similar between the Downy Woodpecker and other *Picoides* spp. such as the Red-cockaded Woodpecker.

Appendix C: Summary Data Tables

Table C - 1. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of experimental artillery simulator testing on Fort Stewart, GA, 1999-2000.

Stimulus	Cluster Tested	Number of	Number of	Number of	No	Noise Levels, SEL (dB)	(dB)	Typical Ambient LEQ
Distance (m)		Noise Events	Data Sessions	Flushes	Cavity level	Base	"W" weighted	(dB) "W" weighted
15.2	79,81,126,136,137,183	9	9	5	98-115	93-107	79-91	27-35
30.5	1,41,47,51,53,79,80,81,86,87,107,126,136,137,159, 172,177,179,183,184,197,198,205,206,221,227,295	33	33	20	99-112	89-105	71-91	23-37
45.7	23,41,137,159,197,198,206,221	8	80	3	97-107	80-100	70-82	24-31
61.0	1,2,6,23,41,47,48,62,75,80,86,87,107,126,159, 172,177,179,183,197,198,205,218,221,232	29	29	11	97-109	81-104	68-99	23-32
76.2	57,80	2	2	1	102-106	74-97	66-75	29-34
91.4	1,2,6,23,57,62,75,80,86,183,184,218,295	13	13	4	100-105	74-101	64-83	27-30
≥ 91.4	36	91	91	77				
121.9	1,2,6,47,48,62,71,75,87,172, 179,184,198,206,218,295	16	16	1	93-104	73-99	61-82	30-39
152.4	206	1	1	0	92	74	29	30
243.8	184	1	1	0		*86	99	31
Totals	37	109	109	45	* two artillery si	* two artillery simulators were detonated together	tonated together	

Table C - 2. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of experimental .50-caliber blank fire testing on Fort Stewart, GA, 1999-2000.

Stimulus	Cluster Tested	Number of	Number of	Number of	N	Noise Levels, SEL (dB)	(dB)	Typical Ambient LEQ
Distance (m)		Noise Events	Data Ses- sions	Flushes	Cavity level unweighted	Base unweighted	"W" weighted	(dB) "W" weighted
15.2	23,53,61,151,194	69	5	4	108-119	96-108	85-98	26-28
30.5	10,23,32,36,47,48,51,60,61,81,87,88, 120,129,148,151,163,172,194,206	328	26	17	105-115	91-106	81-97	30-34
45.7	10,32,107,148,	108	4	2	103-114	88-101	74-90	31-42
61.0	6,10,12,23,36,48,51,57,60,61,75,81,88,107, 120,129,133,139,148,163,172,176,194,205, 206,207,227,289	384	30	14	100-109	84-100	69-87	25-39
76.2	2,36,87	51	3	3	97-105	89-93	78-82	27-32
91.4	6,36,42,57,107,129,133,139,176,205,218,228,289	120	15	8	94-103	80-95	68-82	28-36
≥ 91.4	37	1060	83	48				
121.9	12,23,42,51,57,133,148,176,205,216,228	94	12	2	93-100	84-89	65-79	28-35
152.4	228	24	1	0	94-100	81-87	64-69	32
243.8	228	21	_	0	74	61	42	35
Totals	38	1199	97	20				

Table C - 3. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive M-16 live fire on Fort Stewart, GA, 1999-2000.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve Unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
200-300	103	284	6	0	76-96	75-89	34-43
400-600	3,51,103	1128	8	0	58-77	43-75	34-41
800-900	51	29	1	0	67	47-51	34
1200-2500	23,25,26,83	313	7	0	64-72	34-62	32-35
4000-5000	36,39,48,71,159,267	171	6	0	62-76	33-47	30-34
5001-7000	2	5	1	0	75-76	27-30	23-25
Totals	14	1930	29	0			

Table C - 4. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive helicopter flights on Fort Stewart, GA, 1998-2000.

Stimulus distances represent the closest estimated approach distance by a helicopter.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve Unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
30-50	8,53,57,83,206	11	5	0	103-110	84-92	33-35
51-100	23,53,57,60,206	11	5	0	96-101	79-84	33-37
101-200	2,6,23,48,53,57,60, 83,206,207,216	21	12	0	90-104	68-81	23-37
201-300	2,6,10,23,44,48,53,60, 83,143,151,206,218	25	16	0	87-99	61-74	31-36
301-500	2,25,26,53,142,206, 216,218	15	7	0	73-85	40-64	25-34
Totals	19	83	45	0			

Table C - 5. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise level of passive large-caliber (> 20mm) live fire on Fort Stewart, GA, 1998-2000.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
500-600	83	73	2	2	98-108	64-86	33-41
700-800	172	2	1	0	102-103	70-75	30
1000-3000	23,62,84,159,183,206, 267	284	14	0	69-103	39-61	28-35
3001-5000	41,48,55,81,83, 159, 62,177,184	168	14	0	60-96	36-61	20-33
5001-7000	10,23,57,143,159,184	11	5	0	59-86	30-42	28-31
7001-9000	62,67,76,218	72	3	0	72-84	26-31	22-25
9001-11000	36,37,67,142,172,184	20	6	0	66	27-30	20-25
Totals	24	630	45	2			

Table C - 6. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive vehicles on Fort Stewart, GA, 1998-2000.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve Unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
15-50	12,23,47,57,83,197,21 6	58	13	2	58-110	56-91	28-39
50-100	82,206	12	2	0	82-99	58-73	23-42
101-200	62,139	5	2	0	72-93	64-75	30-34
201-300	6	2	2	0	84-87	49-52	33-36
301-500	51,172,207	4	3	0	76-79	43-54	30
Totals	15	81	22	2			

Table C - 7. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive missile fire on Fort Stewart, GA, 2000.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Sessions	Number of Flushes	Noise Leve Unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
750-1000	88	33	2	0	67-105	25-85	22-24
2000-4000	83,203	62	3	0	65-93	39-64	30-32
4001-6000	75,99	18	2	0	58-85	32-53	27-31
Totals	5	113	7	0			

Table C - 8. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive simulators blasts on Fort Stewart, GA, 1998-1999.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve Unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
100-200	41,103	2	2	1	92-95	78-84	35-38
300-400	103	6	6	0	80-83	47-61	44-45
Totals	2	8	8	1			

Table C - 9. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of experimental M-16 blank fire on Fort Stewart, GA, 1998.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Sessions	Number of Flushes	Noise Lev unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
15.2	36, 37, 76, 142	243	4	1	79 - 93	68-80	33-40
Totals	4	243	4	1			

Table C - 10. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive fixed-wing aircraft (i.e., C-130) on Fort Stewart, GA, 1998.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
500-1000	51	1	1	0	90	62	26
Totals	1	1	1	0			

Table C - 11. Variation in artillery simulator blast noise levels based on year, stimulus distance, microphone position and weighting function on Fort Stewart, GA, 1999-2000.

Noise Type	Year	Sample	Stimulus	Microphone	Weighting	Mean	Std.	95% Confid	ence Interval
		Size	Distance	Position	Function	(dB)	Error	Lower	Upper
			(m)					Bound	Bound
Artillery Simulators	2000	16	15.2	Cavity	Unweighted	107.6 a,c	0.39	106.8	108.4
Artillery Simulators	2000	16	15.2	Base	Unweighted	98.6 b,c	0.89	96.7	100.4
Artillery Simulators	2000	34	30.5	Cavity	Unweighted	106.1 a,b,c	0.57	104.9	107.2
Artillery Simulators	2000	34	30.5	Base	Unweighted	94.8 b,c	0.85	93.0	96.5
Artillery Simulators	2000	9	45.7	Cavity	Unweighted	104.8 a,c	1.03	102.4	107.1
Artillery Simulators	2000	9	45.7	Base	Unweighted	94.8	1.78	90.6	98.9
Artillery Simulators	2000	37	61.0	Cavity	Unweighted	102.8 a,c	0.56	101.6	103.9
Artillery Simulators	2000	37	61.0	Base	Unweighted	87.9 b	1.13	85.6	90.2
Artillery Simulators	2000	5	76.2	Cavity	Unweighted	102.2 ^a	2.36	95.7	108.8
Artillery Simulators	2000	5	76.2	Base	Unweighted	82.8	3.29	73.7	91.9
Artillery Simulators	2000	27	91.4	Cavity	Unweighted	98.7 ^a	1.02	96.6	100.7
Artillery Simulators	2000	27	91.4	Base	Unweighted	81.3	1.4	78.4	84.2
Artillery Simulators	2000	13	121.9	Cavity	Unweighted	95.1 ^{a,b}	0.71	93.5	96.6
Artillery Simulators	2000	13	121.9	Base	Unweighted	74.4 b,c	0.60	73.1	75.7
Artillery Simulators	2000	2	152.4	Cavity	Unweighted	90.0	3.15	49.9	130.0
Artillery Simulators	2000	2	152.4	Base	Unweighted	70.1	1.95	45.3	94.8
Artillery Simulators	1999	16	15.2	Cavity	Unweighted	110.0 a	0.89	108.1	111.9
Artillery Simulators	1999	16	15.2	Base	Unweighted	105.8	0.76	104.2	107.4
Artillery Simulators	1999	33	30.5	Cavity	Unweighted	109.6 ^a	0.72	108.1	111.1

Noise Type	Year	Sample	Stimulus	Microphone	Weighting	Mean	Std.	95% Confid	ence Interval
		Size	Distance (m)	Position	Function	(dB)	Error	Lower Bound	Upper Bound
Artillery Simulators	1999	33	30.5	Base	Unweighted	103.8 ^c	0.49	102.8	104.8
Artillery Simulators	1999	3	121.9	Cavity	Unweighted	105.5	1.68	98.2	112.7
Artillery Simulators	1999	3	121.9	Base	Unweighted	97.5 ^c	1.62	90.5	104.5
Artillery Simulators	2000	16	15.2	Cavity	W-weighted	87.7 b,c	0.98	85.7	89.8
Artillery Simulators	2000	16	15.2	Base	W-weighted	84.8 b,c	1.08	82.5	87.1
Artillery Simulators	2000	34	30.5	Cavity	W-weighted	82.5 b,c	0.76	80.9	84.0
Artillery Simulators	2000	34	30.5	Base	W-weighted	79.6 b,c	0.39	79.0	80.6
Artillery Simulators	2000	9	45.7	Cavity	W-weighted	77.7 ^c	1.77	73.6	81.8
Artillery Simulators	2000	9	45.7	Base	W-weighted	77.3 °	1.49	73.8	80.7
Artillery Simulators	2000	37	61.0	Cavity	W-weighted	74.7 ^c	0.79	73.1	76.3
Artillery Simulators	2000	37	61.0	Base	W-weighted	73.0 b,c	0.59	71.8	74.2
Artillery Simulators	2000	5	76.2	Cavity	W-weighted	72.7	2.76	65.0	80.4
Artillery Simulators	2000	5	76.2	Base	W-weighted	72.0 ^c	1.75	67.1	76.8
Artillery Simulators	2000	27	91.4	Cavity	W-weighted	69.9 ^c	1.14	67.6	72.3
Artillery Simulators	2000	27	91.4	Base	W-weighted	70.2 ^c	0.50	69.2	71.2
Artillery Simulators	2000	13	121.9	Cavity	W-weighted	65.8 b	1.70	62.1	69.5
Artillery Simulators	2000	13	121.9	Base	W-weighted	66.5 ^c	0.98	64.3	68.6
Artillery Simulators	2000	2	152.4	Cavity	W-weighted	54.6	1.50	35.5	73.7
Artillery Simulators	2000	2	152.4	Base	W-weighted	55.5	3.15	15.4	95.5
Artillery Simulators	1999	16	15.2	Cavity	W-weighted	93.9	0.91	91.9	95.8
Artillery Simulators	1999	16	15.2	Base	W-weighted	92.6	0.74	91.0	94.1
Artillery Simulators	1999	33	30.5	Cavity	W-weighted	92.0	0.61	90.7	93.2
Artillery Simulators	1999	33	30.5	Base	W-weighted	90.0	0.45	89.1	90.9
Artillery Simulators	1999	3	121.9	Cavity	W-weighted	77.2	0.33	75.8	78.6
Artillery Simulators	1999	3	121.9	Base	W-weighted	74.4	4.01	56.8	92.0

^a Significant noise level comparison between cavity versus base for the same stimulus type, distance, frequency weighting and year.

Table C - 12. Variation in .50-caliber blank fire noise levels based on year, stimulus distance, microphone position, and weighting function on Fort Stewart, GA, 1999-2000.

Noise Type	Year	Sample	Stimulus	Microphone	Weighting	Mean	Std.	95% Confid	ence Interval
		Size	Distance (m)	Position	Function	(dB)	Error	Lower Bound	Upper Bound
Blank Fire	2000	33	15.2	Cavity	Unweighted	113.7 a	0.51	112.6	114.7
Blank Fire	2000	33	15.2	Base	Unweighted	104.1	0.33	103.5	104.8
Blank Fire	2000	110	30.5	Cavity	Unweighted	111.0 a	0.34	110.3	111.7
Blank Fire	2000	110	30.5	Base	Unweighted	99.2	0.28	98.7	99.8
Blank Fire	2000	24	45.7	Cavity	Unweighted	109.9 a	0.63	108.6	111.2
Blank Fire	2000	24	45.7	Base	Unweighted	96.2	0.44	95.3	97.1
Blank Fire	2000	112	61.0	Cavity	Unweighted	106.0 a	0.40	105.2	106.8
Blank Fire	2000	112	61.0	Base	Unweighted	91.0	0.35	90.3	91.6
Blank Fire	2000	14	76.2	Cavity	Unweighted	103.0 a	1.38	100.0	105.9
Blank Fire	2000	14	76.2	Base	Unweighted	87.1	1.03	84.9	89.3
Blank Fire	2000	76	91.4	Cavity	Unweighted	99.6 a	0.69	98.3	101.0
Blank Fire	2000	76	91.4	Base	Unweighted	85.3 b	0.49	84.3	86.3
Blank Fire	2000	32	121.9	Cavity	Unweighted	98.1 ^a	0.99	96.1	100.2
Blank Fire	2000	32	121.9	Base	Unweighted	80.1 b	0.60	78.9	81.4
Blank Fire	2000	4	152.4	Cavity	Unweighted	87.9 a	0.50	86.3	89.5
Blank Fire	2000	4	152.4	Base	Unweighted	72.6	1.72	67.1	78.1
Blank Fire	1999	74	15.2	Cavity	Unweighted	113.0 a	0.51	112.0	114.0
Blank Fire	1999	74	15.2	Base	Unweighted	105.1	0.38	104.4	105.9
Blank Fire	1999	73	30.5	Cavity	Unweighted	110.4 a	0.66	109.1	111.7
Blank Fire	1999	73	30.5	Base	Unweighted	100.3	0.43	99.5	101.2
Blank Fire	1999	3	45.7	Cavity	Unweighted	101.5	2.21	92.0	111.0
Blank Fire	1999	3	45.7	Base	Unweighted	93.9	2.20	84.5	103.4
Blank Fire	1999	63	61.0	Cavity	Unweighted	105.3 ^a	0.72	103.8	106.7
Blank Fire	1999	63	61.0	Base	Unweighted	92.7	0.45	91.9	93.6
Blank Fire	1999	17	91.4	Cavity	Unweighted	104.7 ^a	1.06	102.4	106.9
Blank Fire	1999	17	91.4	Base	Unweighted	88.7	0.53	87.6	89.9
Blank Fire	1999	34	121.9	Cavity	Unweighted	97.6 a	0.80	96.0	99.3
Blank Fire	1999	34	121.9	Base	Unweighted	84.4	0.64	83.1	85.7
Blank Fire	2000	33	15.2	Cavity	W-weighted	91.8 a	0.69	90.4	93.2
Blank Fire	2000	33	15.2	Base	W-weighted	96.8	0.51	95.7	97.8
Blank Fire	2000	110	30.5	Cavity	W-weighted	88.1 ^a	0.31	87.5	88.7
Blank Fire	2000	110	30.5	Base	W-weighted	90.9 b	0.29	90.3	91.5
Blank Fire	2000	24	45.7	Cavity	W-weighted	85.5	0.59	84.2	86.7
Blank Fire	2000	24	45.7	Base	W-weighted	86.1	0.70	84.6	87.5
Blank Fire	2000	112	61.0	Cavity	W-weighted	82.9	0.36	82.2	83.7
Blank Fire	2000	112	61.0	Base	W-weighted	82.8 b	0.31	82.2	83.4
Blank Fire	2000	14	76.2	Cavity	W-weighted	80.8	1.08	78.5	83.2
Blank Fire	2000	14	76.2	Base	W-weighted	79.4	0.63	78.0	80.8
Blank Fire	2000	76	91.4	Cavity	W-weighted	78.4	0.43	77.5	79.2

^b Significant noise level comparison between 1999 versus 2000 for the same stimulus type, distance and frequency weighting.

^c Significant noise level comparison between artillery simulator and blank fire testing for the same distance, frequency weighting and year.

Noise Type	Year	Sample	Stimulus	Microphone	Weighting	Mean	Std.	95% Confidence Interv	
		Size	Distance	Position	Function	(dB)	Error	Lower	Upper
			(m)					Bound	Bound
Blank Fire	2000	76	91.4	Base	W-weighted	78.7	0.26	78.2	79.2
Blank Fire	2000	32	121.9	Cavity	W-weighted	74.6	1.07	72.4	76.8
Blank Fire	2000	32	121.9	Base	W-weighted	75.3	0.62	74.0	76.5
Blank Fire	2000	4	152.4	Cavity	W-weighted	63.3	1.98	57.0	69.6
Blank Fire	2000	4	152.4	Base	W-weighted	66.2	2.33	58.8	73.6
Blank Fire	1999	74	15.2	Cavity	W-weighted	92.4	0.50	91.4	93.4
Blank Fire	1999	74	15.2	Cavity	W-weighted	94.8	0.44	94.0	95.7
Blank Fire	1999	73	30.5	Cavity	W-weighted	88.7	0.60	87.5	89.9
Blank Fire	1999	73	30.5	Base	W-weighted	88.7	0.47	87.7	89.6
Blank Fire	1999	3	45.7	Cavity	W-weighted	75.5	2.51	64.7	86.3
Blank Fire	1999	3	45.7	Base	W-weighted	77.5	2.43	67.0	87.9
Blank Fire	1999	63	61.0	Cavity	W-weighted	83.1	0.93	81.2	84.9
Blank Fire	1999	63	61.0	Base	W-weighted	79.9	0.62	78.6	81.1
Blank Fire	1999	17	91.4	Cavity	W-weighted	82.6	1.38	79.7	85.6
Blank Fire	1999	17	91.4	Base	W-weighted	76.9	0.58	75.7	78.1
Blank Fire	1999	34	121.9	Cavity	W-weighted	77.6 ^a	0.87	75.9	79.4
Blank Fire	1999	34	121.9	Base	W-weighted	72.7	0.63	71.4	73.9

^a Significant noise level comparison between cavity versus base for the same stimulus type, distance, frequency weighting and year.

Table C - 13. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive M-16 live fire on Fort Stewart, GA, 1999-2000.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes		ls, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
200-300	103	284	6	0	76-96	75-89	34-43
400-600	3,51,103	1128	8	0	58-77	43-75	34-41
800-900	51	29	1	0	67	47-51	34
1200-2500	23,25,26,83	313	7	0	64-72	34-62	32-35
4000-5000	36,39,48,71,159,267	171	6	0	62-76	33-47	30-34
5001-7000	2	5	1	0	75-76	27-30	23-25
Totals	14	1930	29	0			

b Significant noise level comparison between 1999 versus 2000 for the same stimulus type, distance and frequency weighting.

^c Significant noise level comparison between artillery simulator and blank fire testing for the same distance, frequency weighting and year.

Table C - 14. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise levels of passive helicopter flights on Fort Stewart, GA, 1998-2000.

Stimulus distances represent the closest estimated approach distance by a helicopter.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Leve Unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) "W" weighted
30-50	8,53,57,83,206	11	5	0	103-110	84-92	33-35
51-100	23,53,57,60,206	11	5	0	96-101	79-84	33-37
101-200	2,6,23,48,53,57,60, 83,206,207,216	21	12	0	90-104	68-81	23-37
201-300	2,6,10,23,44,48,53,60, 83, 143,151,206,218	25	16	0	87-99	61-74	31-36
301-500	2,25,26,53,142,206, 216,218	15	7	0	73-85	40-64	25-34
Totals	19	83	45	0			

Table C - 15. Flush response of nesting Red-cockaded Woodpeckers versus the number, distance, and noise level of passive large-caliber (> 20mm) live fire on Fort Stewart, GA, 1998-2000.

Stimulus Distance (m)	Cluster Tested	Number of Noise Events	Number of Data Ses- sions	Number of Flushes	Noise Lev- unweighted	els, SEL (dB) "W" weighted	Typical Ambient LEQ (dB) " W" weighted
500-600	83	73	2	2	98-108	64-86	33-41
700-800	172	2	1	0	102-103	70-75	30
1000-3000	23,62,84,159,183,206, 267	284	14	0	69-103	39-61	28-35
3001-5000	41,48,55,81,83,159, 162,177,184	168	14	0	60-96	36-61	20-33
5001-7000	10,23,57,143,159,184	11	5	0	59-86	30-42	28-31
7001-9000	62,67,76,218	72	3	0	72-84	26-31	22-25
9001-11000	36,37,67,142,172,184	20	6	0	66	27-30	20-25
Totals	24	630	45	2			

Appendix D: Source Spectra Examples

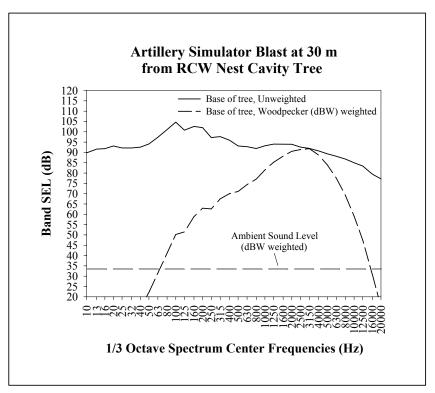


Figure D - 1. Weighting comparison for experimental artillery simulator blast at cluster 47 on 5 June 2000 (post-fledging testing).

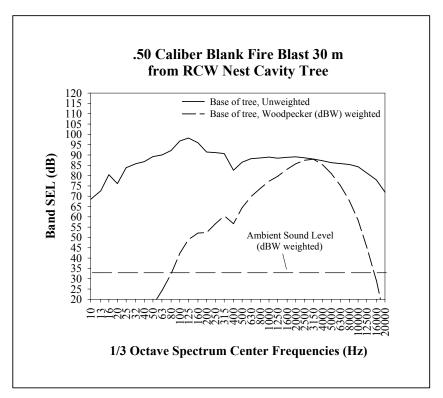


Figure D - 2. Weighting comparison for experimental .50-caliber blank fire at cluster 47 on 5 June 2000 (post-fledging testing)

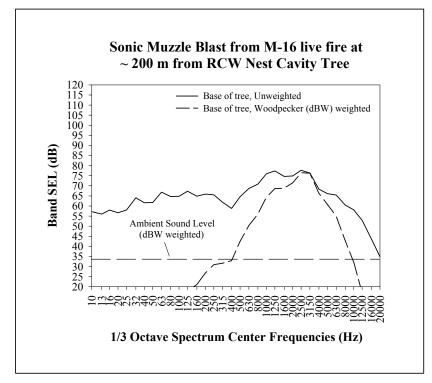


Figure D - 3. Weighting comparison for passive M-16 live fire at cluster 103 on 6 May 2000.

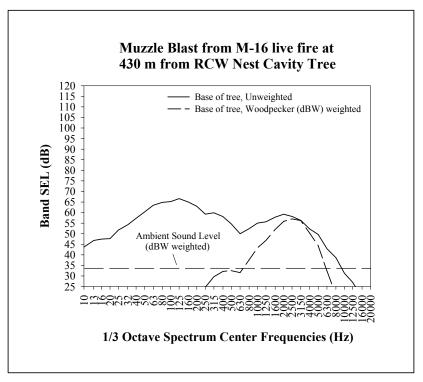


Figure D - 4. Weighting comparison for passive M-16 live muzzle blast fire at cluster 103 on 6 May 2000.

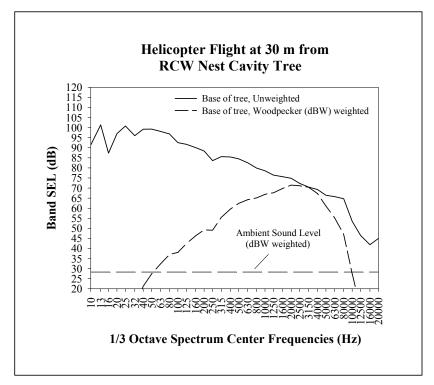


Figure D - 5. Weighting comparison for a passive helicopter flight at cluster 206 on 25 May 2000.

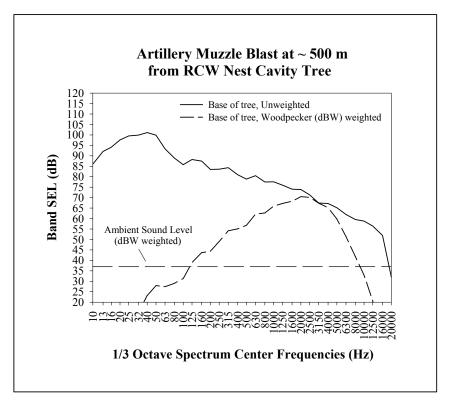


Figure D - 6. Weighting comparison for passive artillery muzzle blast noise at cluster 83 on 21 May 1998.

This blast elicited a flush response by the attending RCW.

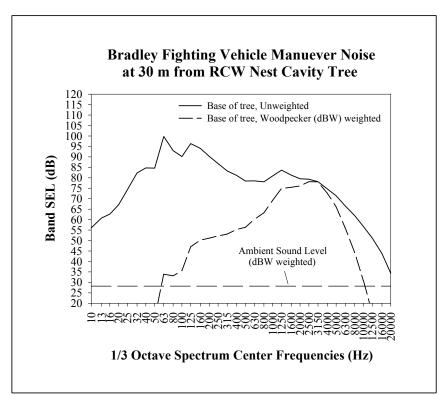


Figure D - 7. Weighting comparison for passive artillery muzzle blast noise at cluster 83 on 21 May 1998.

This blast elicited a flush response by the attending RCW.

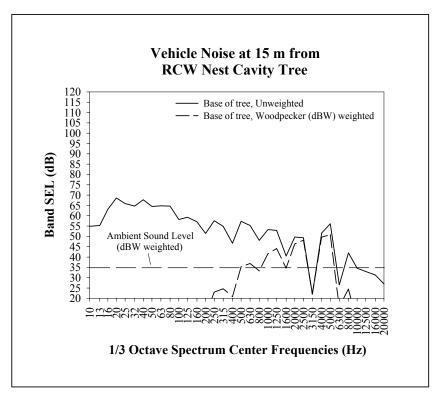


Figure D - 8. Weighting comparison for passive vehicle noise at cluster 23 on 16 May 2000.

This event elicited a flush response by the attending RCW.

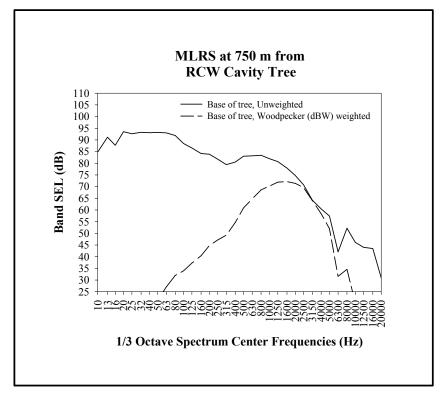


Figure D - 9. . Weighting comparison for passive MLRS fire at cluster 88 on 13 April 2000.

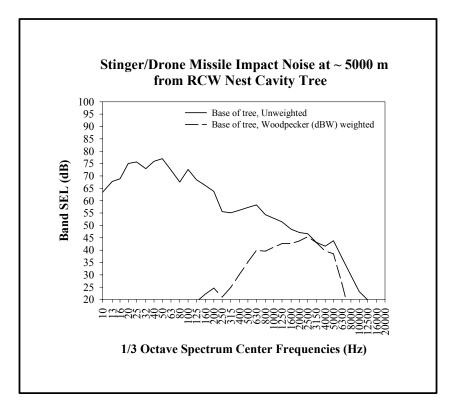


Figure D - 10. Weighting comparison for passive Stinger/Drone Missile impact at cluster 83 on 16 May 2000.

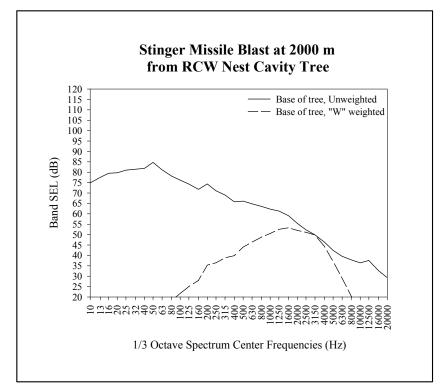


Figure D - 11. Weighting comparison of passive Stinger Missile fire at cluster 83 on 16 May 2000.

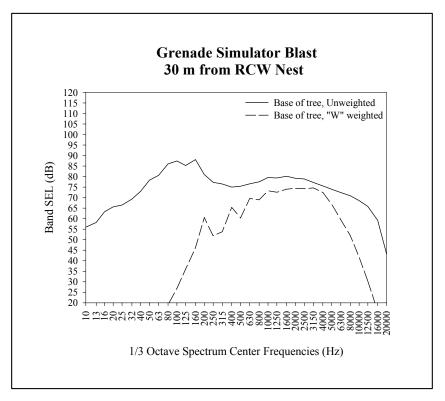


Figure D - 12. Weighting comparison of a passive grenade simulator blast at cluster 221 on 23 June 2000.

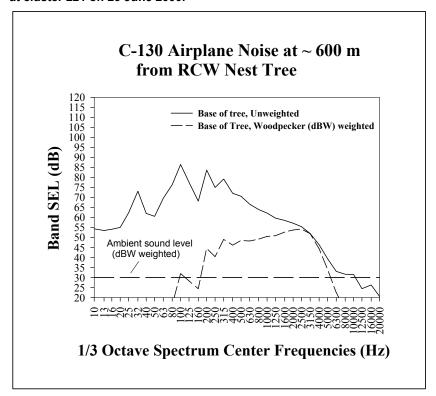


Figure D - 13. Weighting comparison for passive C-130 airplane flight at cluster 51 on 15 May 1998.

Appendix E: Video Images from RCW Nests



Figure E - 1. Red-bellied Woodpecker usurping a nest from a Red-cockaded Woodpecker in 2000 on Fort Stewart, GA.



Figure E - 2. Rat snake leaving a Red-cockaded Woodpecker nest after consuming two eggs and two nestlings in 1998 on Fort Stewart, GA.



Figure E - 3. Nest depredation attempt by a Red-shouldered Hawk in 1998 on Fort Stewart, GA.



Figure E - 4. Nest depredation attempt by an American Crow in 2000 on Fort Stewart, GA.

CERL Distribution

Chief of Engineers

ATTN: CEHEC-IM-LH (2)

SERDP (3)

Engineer Research and Development Center (Libraries)

ATTN: ERDC, Vicksburg, MS

ATTN: Cold Regions Research, Hanover, NH

ATTN: Topographic Engineering Center, Alexandria, VA

Defense Tech Info Center 22304

ATTN: DTIC-O

8 9/02

REPORT DOCUMENTATION PAGE

Form Approved OMB No. 0704-0188

Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing this collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.

1. REPORT DATE (DD-MM-YYYY)	2. REPORT TYPE	3. DATES COVERED (From - To)		
11-2002	Final			
4. TITLE AND SUBTITLE		5a. CONTRACT NUMBER		
Assessment of Training Noise Impacts	on the Red-Cockaded Woodpecker: 1998 - 2000			
		5b. GRANT NUMBER		
		5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S)		5d. PROJECT NUMBER		
	ert J. Dooling, Bernard Lohr, Beth F. Brittan-Powell,	SERDP		
	y D. Carlile, Eric W. Spadgenske, Bruce A.	5e. TASK NUMBER		
MacAllister, and Robert H. Melton		CS-1083		
		5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(8. PERFORMING ORGANIZATION REPORT NUMBER		
U.S. Army Engneer Research and Deve	1 ,	ERDC/CERL TR-02-32		
Construction Engineering Research Lai PO Box 9005	boratory (CERL)	ERDC/CERL TR-02-32		
1 0 2011 9 0 0 0				
Champaign, IL 61826-9005				
9. SPONSORING / MONITORING AGENCY	NAME(S) AND ADDRESS(ES)	10. SPONSOR/MONITOR'S ACRONYM(S)		
Strategic Environmental Research and		Program Manager		
Development Center				
901 N. Stuart St., Suite 303	11. SPONSOR/MONITOR'S REPORT			
Arlington, VA 22203-1853		NUMBER(S)		

12. DISTRIBUTION / AVAILABILITY STATEMENT

Approved for public release; distribution is unlimited.

13. SUPPLEMENTARY NOTES

Copies are available from the National Technical Information Service, 5285 Port Royal Road, Springfield, VA 22161.

14. ABSTRACT

It is estimated that nearly a quarter of the remaining Red-cockaded Woodpecker (RCW) population resides on 16 military installations in the southeastern United States. Such a close association has led to increased conflicts between TES conservation requirements and the military's mission of maintaining a high degree of combat readiness. Increased importance has been placed on determining how noise affects these species. The primary research objective of this multiyear study is to determine the impact of certain types of training noise on the endangered RCW. A second objective is to develop and disseminate cost-effective techniques for documenting the effects of training noise on TES populations.

During this study the research team observed and documented experimental training noise events and the resulting RCW responses under realistic conditions. Both proximate response behavior and nesting success were measured. The team also observed RCW behavior and nesting success for groups where noise stimuli were absent or minimal (near or below ambient sound levels), to provide an undisturbed behavior baseline to judge response and impact against. No significant differences in nesting success or productivity were found between experimentally disturbed and relatively undisturbed RCW groups.

15. SUBJECT TERMS

threatened and endangered species (TES), Red-cockaded woodpecker (picoides borealis), noise, military training, military installations

16. SECURITY CLASS	SIFICATION OF:		17. LIMITATION OF ABSTRACT	18. NUMBER OF PAGES	19a. NAME OF RESPONSIBLE PERSON Larry D. Pater
a. REPORT Unclassified	b. ABSTRACT Unclassified	c. THIS PAGE Unclassified	SAR	101	19b. TELEPHONE NUMBER (include area code) (217) 352-6511, ext 7351